


# Product data sheet

## Characteristics

# LV833038SP

XF or MX voltage release, diagnostics and communicating, Masterpact MTZ1/2/3, 380/480 VAC 50/60 Hz, spare part

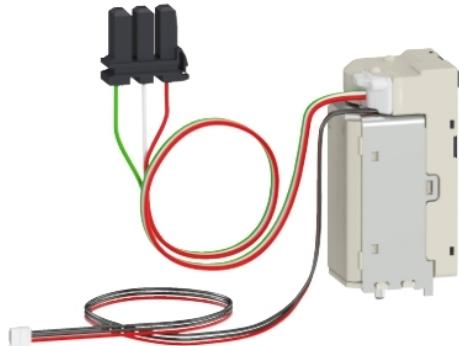

### Main

Range	Masterpact
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ1 circuit-breaker Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker
Voltage release type	Closing coil Opening coil

### Complementary

Control type	Communicating
Signalling function	Electrical push-button activated Ready to close or open Error Coil powered
[Un] voltage power supply	380/480 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening 0.85...1.1 Un on closing
Holding power consumption	4.5 VA
Circuit breaker mounting mode	Fixed/drawout
Maximum response time	60 ms on opening for Masterpact MTZ1 60 ms on opening for Masterpact MTZ2 60 ms on opening for Masterpact MTZ3 65 ms on closing for Masterpact MTZ1 80 ms on closing for Masterpact MTZ2 90 ms on closing for Masterpact MTZ3
Provided equipment	1 instruction sheet
Offer type	Spare part

### Packing Units

Package 1 Weight	0.318 kg
Package 1 Height	3.000 cm
Package 1 width	6.000 cm
Package 1 Length	8.000 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

