


Product data sheet

Characteristics

LV833662SP

XF or MX voltage release, standard,
Masterpact MTZ1/2/3, 200/250 VAC 50/60 Hz,
200/250 VDC, spare part

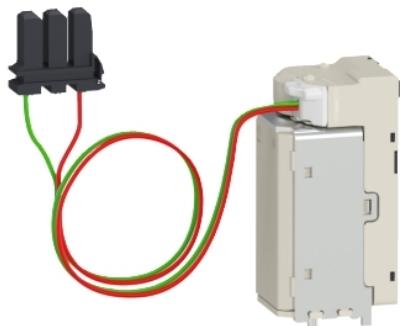

Main

Range	Masterpact
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker Masterpact MTZ1 circuit-breaker
Voltage release type	Closing coil Opening coil

Complementary

[Un] voltage power supply	200...250 V AC 50/60 Hz 200...250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening 0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed/drawout
Maximum response time	60 ms on opening for Masterpact MTZ1 60 ms on opening for Masterpact MTZ2 60 ms on opening for Masterpact MTZ3 65 ms on closing for Masterpact MTZ1 80 ms on closing for Masterpact MTZ2 90 ms on closing for Masterpact MTZ3
Provided equipment	1 instruction sheet
Offer type	Spare part

Packing Units

Package 1 Weight	0.235 kg
Package 1 Height	3.500 cm
Package 1 width	6.200 cm
Package 1 Length	8.500 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	<input checked="" type="checkbox"/> End Of Life Information