


Product data sheet

Characteristics

LV833795

MX opening voltage release, diagnostics and communicating, Masterpact MTZ1 drawout, 200/250 VAC 50/60 Hz, 200/250 VDC

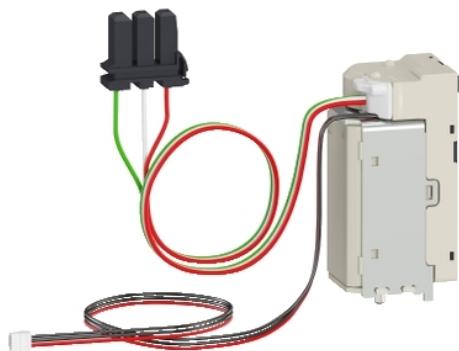

Main

Range	Masterpact
Device short name	MX diag & com
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ1 circuit-breaker
Voltage release type	Opening coil

Complementary

Control type	Communicating
Signalling function	Error Ready to close or open Coil powered Electrical push-button activated
[Un] voltage power supply	200...250 V AC 50/60 Hz 200...250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 W
Circuit breaker mounting mode	Drawout
Maximum response time	60 ms on opening for Masterpact MTZ1

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information