


# Product data sheet

## Characteristics

# LV833797

MX opening voltage release, diagnostics and communicating, Masterpact MTZ1 drawout, 380/480 VAC 50/60 Hz

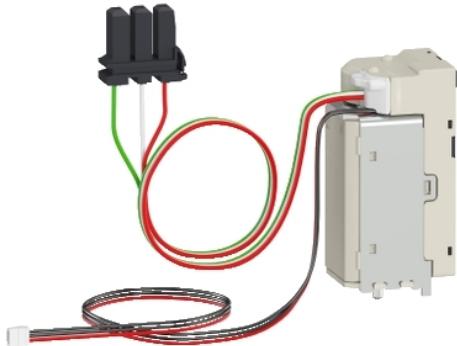

### Main

Range	Masterpact
Device short name	MX diag & com
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ1 circuit-breaker
Voltage release type	Opening coil

### Complementary

Control type	Communicating
Signalling function	Error Electrical push-button activated Ready to close or open Coil powered
[Un] voltage power supply	380...480 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 VA
Circuit breaker mounting mode	Drawout
Maximum response time	60 ms on opening for Masterpact MTZ1

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.167 kg
Package 1 Height	3.5 cm
Package 1 width	9 cm
Package 1 Length	6 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>
Environmental Disclosure	<input checked="" type="checkbox"/> <a href="#">Product Environmental Profile</a>
Circularity Profile	<input checked="" type="checkbox"/> <a href="#">End Of Life Information</a>