


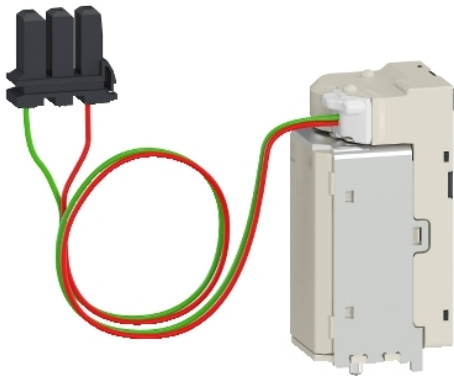

Main

Range	Masterpact
Device short name	XF
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker Masterpact MTZ1 circuit-breaker
Voltage release type	Closing coil

Complementary

Control type	Standard
[Un] voltage power supply	48 V AC 50/60 Hz 48...60 V DC
Threshold tripping voltage	0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed
Maximum response time	65 ms on closing for Masterpact MTZ1 80 ms on closing for Masterpact MTZ2 90 ms on closing for Masterpact MTZ3

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins