


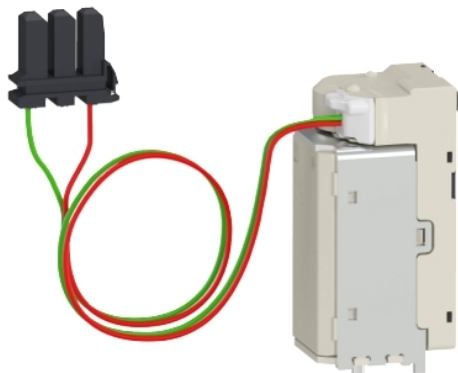

## Main

|                           |                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------|
| Range                     | Masterpact                                                                                            |
| Device short name         | MX                                                                                                    |
| Product or component type | Voltage release                                                                                       |
| Device application        | Control                                                                                               |
| Range compatibility       | Masterpact MTZ2 circuit-breaker<br>Masterpact MTZ3 circuit-breaker<br>Masterpact MTZ1 circuit-breaker |
| Voltage release type      | Opening coil                                                                                          |

## Complementary

|                               |                                                                                                                      |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Control type                  | Standard                                                                                                             |
| [Un] voltage power supply     | 48 V AC 50/60 Hz<br>48...60 V DC                                                                                     |
| Threshold tripping voltage    | 0.7...1.1 Un on opening                                                                                              |
| Holding power consumption     | 4.5 W                                                                                                                |
| Circuit breaker mounting mode | Fixed                                                                                                                |
| Maximum response time         | 60 ms on opening for Masterpact MTZ1<br>60 ms on opening for Masterpact MTZ2<br>60 ms on opening for Masterpact MTZ3 |

## Offer Sustainability

|                            |                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                             |
| REACH Regulation           |  <a href="#">REACH Declaration</a>             |
| EU RoHS Directive          | Compliant  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                               |
| RoHS exemption information |  <a href="#">Yes</a>                           |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>        |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a> |
| Circularity Profile        |  <a href="#">End Of Life Information</a>       |