


# Product data sheet

## Characteristics

# LV847455

## MX 2nd opening voltage release - 380/480 V AC - for drawout MTZ1

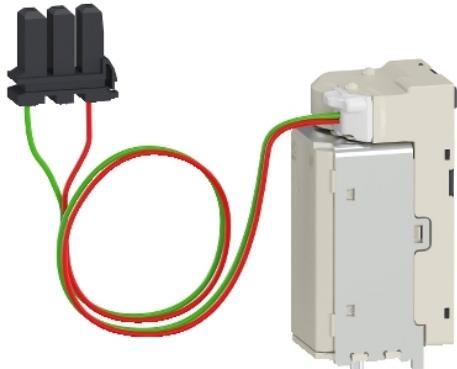

### Main

Range	Masterpact
Device short name	Second MX
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ1 circuit-breaker
Voltage release type	Shunt trip release

### Complementary

Control type	Standard
[Un] voltage power supply	380...480 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 VA
Circuit breaker mounting mode	Drawout
Maximum response time	60 ms on opening for Masterpact MTZ1

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>
Environmental Disclosure	<input checked="" type="checkbox"/> <a href="#">Product Environmental Profile</a>
Circularity Profile	<input checked="" type="checkbox"/> <a href="#">End Of Life Information</a>