


# Product data sheet

## Characteristics

# LV848483

XF closing voltage release, standard,  
Masterpact MTZ2/3 drawout, 100/130 VAC  
50/60 Hz, 100/130 VDC

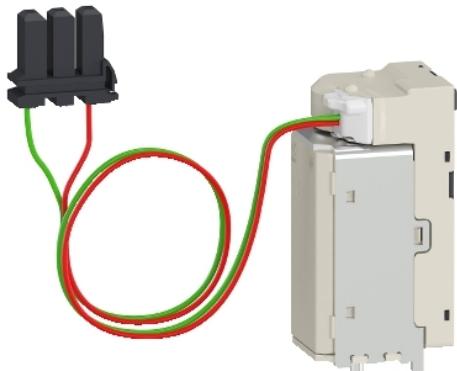

### Main

Range	Masterpact
Device short name	XF
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker
Voltage release type	Closing coil

### Complementary

Control type	Standard
[Un] voltage power supply	100...130 V AC 50/60 Hz 100...130 V DC
Threshold tripping voltage	0.85...1.1 Un on closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Drawout
Maximum response time	80 ms on closing for Masterpact MTZ2 90 ms on closing for Masterpact MTZ3

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>