


# Product data sheet

## Characteristics

# LV836669SP

MN undervoltage release, diagnostics,  
Masterpact MTZ1/2/3, 48 VAC 50/60 Hz, 48/60  
VDC, spare part

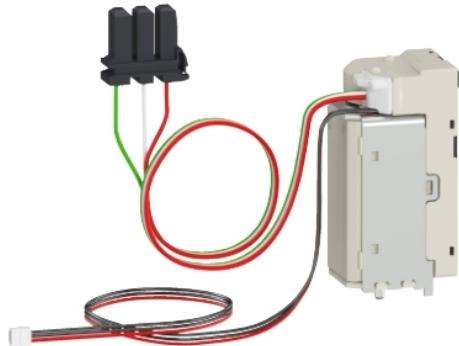

### Main

Maximum response time	45 ms on opening for Masterpact MTZ1 95 ms on opening for Masterpact MTZ2 95 ms on opening for Masterpact MTZ3
Range	Masterpact
Device short name	MN diag
Product or component type	Undervoltage release
Device application	Safety
Range compatibility	Masterpact MTZ1 circuit breaker Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker
Voltage release type	Instantaneous

### Complementary

Control type	Communicating
Signalling function	Coil powered MN open Error
[Un] voltage power supply	48 V AC 50/60 Hz 48...60 V DC
Threshold tripping voltage	0.35...0.7 Un opening 0.85 Un closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed/drawout
Provided equipment	1 instruction sheet
Offer type	Spare part

### Packing Units

Package 1 Weight	0.223 kg
Package 1 Height	6.000 cm
Package 1 width	3.200 cm
Package 1 Length	8.200 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>
Environmental Disclosure	<input checked="" type="checkbox"/> <a href="#">Product Environmental Profile</a>
Circularity Profile	<input checked="" type="checkbox"/> <a href="#">End Of Life Information</a>