


# Product data sheet

## Characteristics

33812

MX shunt release, ComPact NS630b to NS1600 drawout, MasterPact NT drawout, rated voltage 100/130 VDC, 100/130 VAC 50/60 Hz

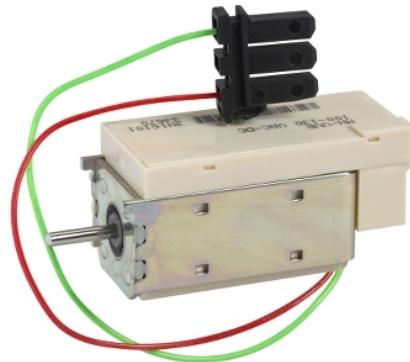

### Main

|                              |   |
|------------------------------|---|
| Device short name            | MX  |
| Product or component type    | Voltage release                           |
| Device application           | Control                                   |
| Range compatibility          | MasterPact NT<br>ComPact NS630b...1600    |
| Voltage release type         | Shunt trip release                        |
| [Uc] control circuit voltage | 100...130 V AC 50/60 Hz<br>100...130 V DC |

### Complementary

|                            |  |
|----------------------------|--|
| Threshold tripping voltage | 0.7...1.1 x Un   |
| Supply holding power       | 4.5 VA   |
| Mounting mode              | Drawout  |
| Response time              | 50 ms (Compact NS630b...1600)<br>55 ms (Masterpact NT) |

### Offer Sustainability

|                            |  |
|----------------------------|--|
| REACH Regulation           |  <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information |  <a href="#">Yes</a>  |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>   |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|