


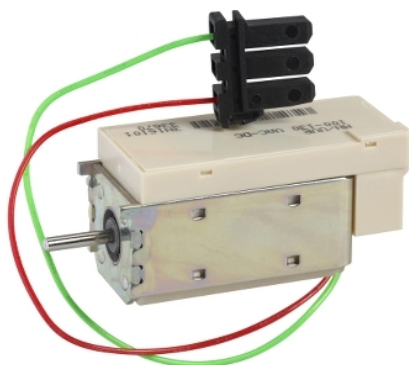

### Main

|                              |                                           |
|------------------------------|-------------------------------------------|
| Device short name            | XF                                        |
| Product or component type    | Voltage release                           |
| Device application           | Control                                   |
| Range compatibility          | Masterpact NW                             |
| [Uc] control circuit voltage | 100...130 V AC 50/60 Hz<br>100...130 V DC |

### Complementary

|                            |                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Threshold tripping voltage | 0.85...1.1 Un                                                                                                                                                                                                                                                                                                                                                                                |
| Supply holding power       | 4.5 VA                                                                                                                                                                                                                                                                                                                                                                                       |
| Mounting mode              | Drawout                                                                                                                                                                                                                                                                                                                                                                                      |
| Response time              | 70 ms at 800 A (Masterpact NW)<br>70 ms at 1000 A (Masterpact NW)<br>70 ms at 1250 A (Masterpact NW)<br>70 ms at 1600 A (Masterpact NW)<br>70 ms at 2000 A (Masterpact NW)<br>70 ms at 2500 A (Masterpact NW)<br>70 ms at 3200 A (Masterpact NW)<br>70 ms at 4000 A (Masterpact NW)<br>80 ms at 4000 A (Masterpact NW)<br>80 ms at 5000 A (Masterpact NW)<br>80 ms at 6300 A (Masterpact NW) |

### Offer Sustainability

|                            |                                               |
|----------------------------|-----------------------------------------------|
| REACH Regulation           | <a href="#">REACH Declaration</a>             |
| EU RoHS Directive          | Compliant <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                           |
| RoHS exemption information | <a href="#">Yes</a>                           |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>        |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|