


# Product data sheet

## Characteristics

48484

XF closing voltage release for drawout  
Masterpact NW, 200 VDC to 250 VDC, 200  
VAC to 250 VAC 50/60 Hz

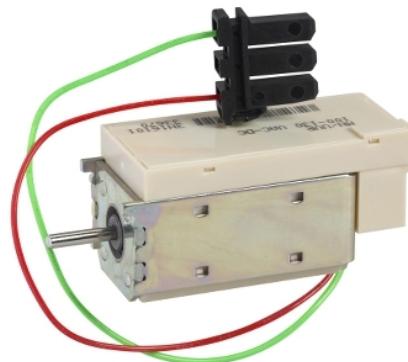

### Main

Device short name	XF
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact NW
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

### Complementary

Threshold tripping voltage	0.85...1.1 Un
Supply holding power	4.5 VA
Mounting mode	Drawout
Response time	70 ms at 800 A (Masterpact NW) 70 ms at 1000 A (Masterpact NW) 70 ms at 1250 A (Masterpact NW) 70 ms at 1600 A (Masterpact NW) 70 ms at 2000 A (Masterpact NW) 70 ms at 2500 A (Masterpact NW) 70 ms at 3200 A (Masterpact NW) 70 ms at 4000 A (Masterpact NW) 80 ms at 4000 A (Masterpact NW) 80 ms at 5000 A (Masterpact NW) 80 ms at 6300 A (Masterpact NW)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	180 g
Package 1 Height	4 cm
Package 1 width	11 cm
Package 1 Length	12 cm

### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------