


Product data sheet

Characteristics

48504

MN undervoltage release for drawout
Masterpact NW, 200 VDC to 250 VDC, 200
VAC to 250 VAC 50/60 Hz

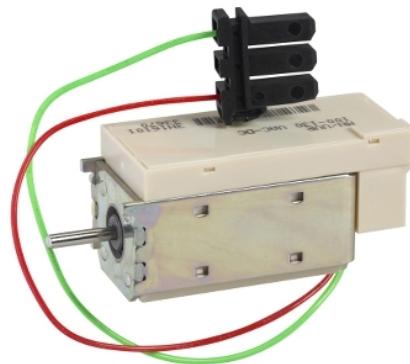

Main

Device short name	MN
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact NW
Voltage release type	Undervoltage release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

Complementary

Threshold tripping voltage	0.35...0.7 Un opening 0.85 Un closing
Supply holding power	4.5 VA
Mounting mode	Drawout
Response time	90 ms (Masterpact NW)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------