


# Product data sheet

## Characteristics

47363

voltage release MX - 200..250 V DC/AC 50/60 Hz

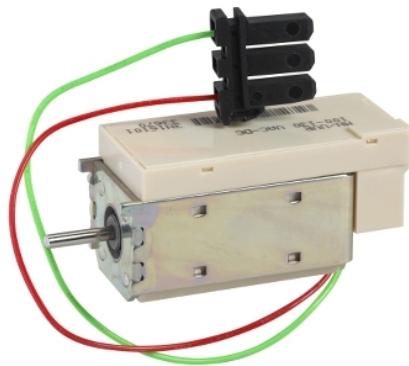

### Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW
Voltage release type	Shunt trip release
[Uc] control circuit voltage	200...250 V AC 50/60 Hz 200...250 V DC

### Complementary

Threshold tripping voltage	0.7...1.1 Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	50 ms

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	173 g
Package 1 Height	5 cm
Package 1 width	6 cm
Package 1 Length	8.5 cm

### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------