


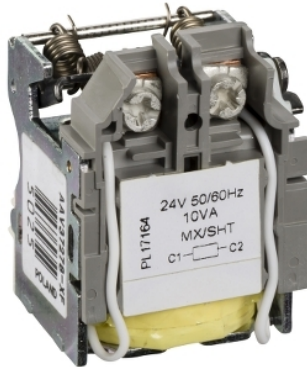

### Main

|                              |                                                                          |
|------------------------------|--------------------------------------------------------------------------|
| Device short name            | MX                                                                       |
| Product or component type    | Voltage release                                                          |
| Device application           | Control                                                                  |
| Range compatibility          | ComPact NSX<br>EasyPact CVS<br>PowerPact Multistandard<br>ComPact NSX DC |
| Voltage release type         | Shunt trip release                                                       |
| [Uc] control circuit voltage | 24 V AC 50/60 Hz                                                         |

### Complementary

|                               |                                              |
|-------------------------------|----------------------------------------------|
| Control signal type           | Maintained Impulse                           |
| Impulse duration              | $\geq 20$ ms                                 |
| Threshold tripping voltage    | $0.7 \dots 1.1 \times U_n$ opening           |
| Supply inrush power           | 10 VA                                        |
| Mounting mode                 | Fixed                                        |
| Response time                 | 50 ms                                        |
| Auxiliary connection terminal | Screw terminal $0 \dots 1.5$ mm <sup>2</sup> |

### Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 130 g    |
| Package 1 Height             | 6.2 cm   |
| Package 1 width              | 4 cm     |
| Package 1 Length             | 8 cm     |
| Unit Type of Package 2       | BB1      |
| Number of Units in Package 2 | 10       |
| Package 2 Weight             | 1.372 kg |
| Package 2 Height             | 9 cm     |
| Package 2 width              | 15 cm    |
| Package 2 Length             | 22 cm    |
| Unit Type of Package 3       | S03      |
| Number of Units in Package 3 | 60       |
| Package 3 Weight             | 8.8 kg   |
| Package 3 Height             | 30 cm    |
| Package 3 width              | 30 cm    |
| Package 3 Length             | 40 cm    |

## Offer Sustainability

|                            |                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                           |
| REACH Regulation           | <a href="#"> REACH Declaration</a>             |
| EU RoHS Directive          | Compliant <a href="#"> EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                             |
| RoHS exemption information | <a href="#"> Yes</a>                           |
| China RoHS Regulation      | <a href="#"> China RoHS Declaration</a>        |
| Environmental Disclosure   | <a href="#"> Product Environmental Profile</a> |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins     |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|