




Main

Product or component type	Sinus filter
Range compatibility	Altivar Process ATV900 Altivar 71 Altivar Process ATV600 Altivar 61 Altivar 61Q Altivar 71Q
Product specific application	Output filter
[In] rated current	600 A
Thermal losses	2370 W at 100 Hz
Product compatibility	ATV61QC25N4 ATV71HC25N4 ATV71QC25N4 ATV61HC25N4 ATV61HC31N4 ATV61HC40N4 ATV61QC31N4 ATV61QC40N4 ATV71HC28N4 ATV71HC31N4 ATV71HC40N4 ATV71QC31N4 ATV71QC40N4 ATV930 variable speed drive wall mount - 250 kW, 380...480 V ATV930 variable speed drive wall mount - 315 kW, 380...480 V
Switching frequency	4...8 kHz
Maximum output frequency	100 Hz
Maximum permissible voltage	500 V AC

Complementary

Electrical connection	Bare wires diameter: 14 mm
Maximum voltage drop at rated load	10 %
Max current	1.5 x nominal current (duration = 60 s)
Net weight	260 kg

Environment

IP degree of protection	IP00
Environmental characteristic	3B1 conforming to IEC 721-3-3 3C2 conforming to IEC 721-3-3 3S1 conforming to IEC 721-3-3
Pollution degree	2 conforming to EN 50178
Vibration resistance	1 gn (f= 13...200 Hz) conforming to IEC 60068-2 1.5 mm peak to peak (f= 3...13 Hz) conforming to IEC 60068-2
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative humidity	0...95 %
Ambient air temperature for operation	40...50 °C (with current derating 1.5 % per °C) -10...40 °C (without current derating)
Ambient air temperature for storage	-40...65 °C
Operating altitude	<= 1000 m without current derating 1000...3000 m with current derating 1 % per 100 m

Packing Units

Package 1 Weight	224.500 kg
Package 1 Height	9.500 dm
Package 1 width	4.500 dm
Package 1 Length	7.000 dm


Offer Sustainability

REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

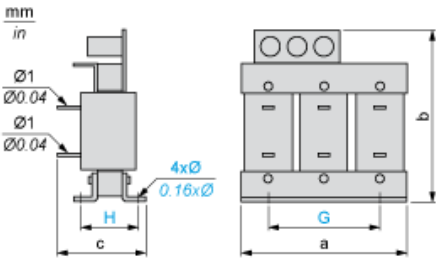

Dimensions in mm

a	b	c	G	H	Ø	Ø1
480	710	370	430	258	13 x 18	14

Dimensions in in.

a	b	c	G	H	Ø	Ø1
18.90	27.95	14.57	16.93	10.16	0.51 x 0.71	0.55

Mounting Recommendations

