


# Product data sheet

## Characteristics

### A9A15216

Acti 9 modular bell transformer iTR - 230 V  
50..60 Hz - output 8..12 V - 8 VA

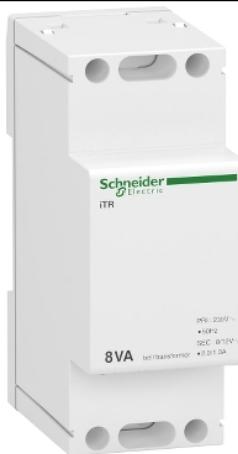

#### Main

Range of product	Acti 9
Product name	Acti 9 iTR
Product or component type	Transformer
Device short name	ITR
Transformer type	Bell transformer

#### Complementary

[Ue] rated operational voltage	230 V AC 50/60 Hz
Output voltage	8/12 V: +/- 15 % on load 13/18 V: off load
Output short-circuit protection	Built-in
Rated power in VA	8 VA
Mounting mode	Fixed
Mounting support	35 mm symmetrical DIN rail
9 mm pitches	4
Height	89 mm
Width	36 mm
Depth	60 mm
Colour	White
Auxiliary connection terminal	Tunnel type terminalsrigid 2.5 mm <sup>2</sup> Tunnel type terminalsflexible 2.5 mm <sup>2</sup> Tunnel type terminalsflexible with ferrule 2.5 mm <sup>2</sup>
Wire stripping length	6 mm
Tightening torque	0.5 N.m

#### Environment

Standards	EN 60742 EN 61558-2-6 IEC 61558-2-6
Product certifications	NF
IP degree of protection	IP20 conforming to IEC 60529
Overvoltage category	Class II with terminal shields in option
Ambient air temperature for operation	-20...55 °C
Ambient air temperature for storage	-25...80 °C

#### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	270 g
Package 1 Height	4 cm
Package 1 width	7 cm
Package 1 Length	9.5 cm

Unit Type of Package 2	S02
Number of Units in Package 2	28
Package 2 Weight	7.786 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

### Contractual warranty

Warranty	18 months
----------	-----------