

Product data sheet

Characteristics

9001KR3U

Head for spring return push button, Harmony 9001K, metal, projecting, 7 colours choice, 30mm



Main

Range of product	Harmony 9001K
Product or component type	Head for push-button
Device short name	9001K
Operator profile	Projecting, unmarked
Operator additional information	Without guard

Complementary

Mounting diameter	30 mm
Shape of signaling unit head	Round
Type of operator	Spring return
Net weight	0.09 kg
Bezel material	Metal
Cap/operator or lens colour	7 colours choice
Operator profile	Projecting
Type of operator	Spring return
Contacts type and composition	Without contact block

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.08 cm
Package 1 Width	5.842 cm
Package 1 Length	7.112 cm
Package 1 Weight	104.326 g
Unit Type of Package 2	PAL
Number of Units in Package 2	3200
Package 2 Height	101.6 cm
Package 2 Width	101.6 cm
Package 2 Length	121.92 cm
Package 2 Weight	347.451 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

mm
in.

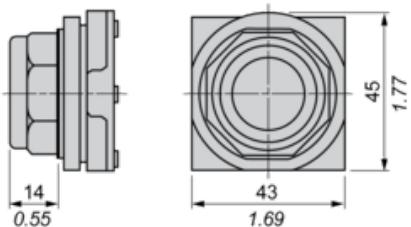

Contact Block Mounting Position

Top and Rear views

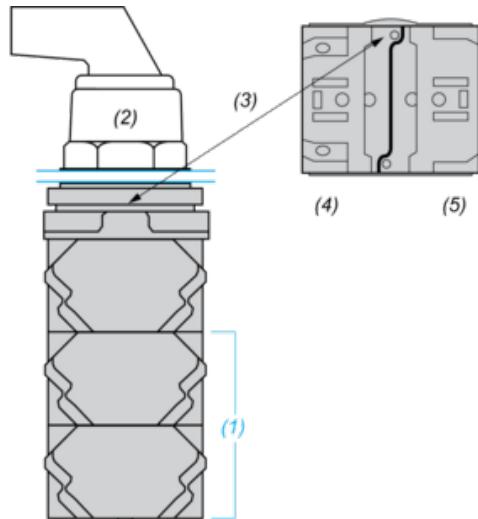

(1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)

(2) Operator


(3) Locating notch

(4) Side 1

(5) Side 2

Panel Cut-Out

Clearance

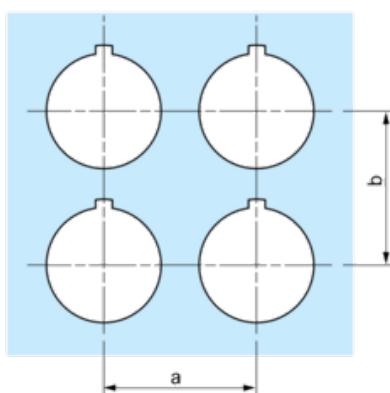

Legend plate	a min.		b min.	
	mm	in.	mm	in.
9001KN2..	57.2	2.25	44.5	1.75
9001KN3..	57.2	2.25	50.8	2.00

Individual Cut-outs Details

2 alternatives

mm
in.

