

Product data sheet

Characteristics

9001KS11FB

Head for selector switch, Harmony 9001K, metal, long handle, black, 30mm, 2 positions, stay put



Main

| | |
|---------------------------|--------------------------|
| Range of product | Harmony 9001K |
| Product or component type | Head for selector switch |
| Device short name | 9001K |
| Type of operator | Stay put |
| Operator profile | Black long handle |

Complementary

| | |
|-------------------------------|------------------------------|
| Bezel material | Metal |
| Mounting diameter | 30 mm |
| Net weight | 0.172 kg |
| Shape of signaling unit head | Octagonal |
| Operator position information | 2 positions |
| Contacts type and composition | Without contact block |
| Mechanical durability | 500000 cycles |
| Product compatibility | 9001KA2, mounted side 1 or 2 |
| Device presentation | Basic element |
| Cap/operator or lens colour | Black |
| Operator profile | Long handle |
| Type of operator | Stay put |
| Size | 30 mm |
| Cam profile | 5 |

Environment

| | |
|---------------------------------------|---|
| Protective treatment | TC |
| Ambient air temperature for storage | -40...70 °C |
| Ambient air temperature for operation | -25...70 °C |
| Overvoltage category | Class II conforming to IEC 61140 |
| IP degree of protection | IP66 conforming to IEC 60529 |
| NEMA degree of protection | NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 |
| Standards | CSA C22.2 No 14 IEC 60947-5-4 JIS C 852 IEC 60947-5-1 IEC 60947-1 JIS C 4520 UL 508 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|------------------------|--|
| Product certifications | NEMA[RETURN]JUL 508 |
| Vibration resistance | 7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 50 gn conforming to IEC 60068-2-27 |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 5.000 cm |
| Package 1 Width | 5.600 cm |
| Package 1 Length | 9.300 cm |
| Package 1 Weight | 126.000 g |
| Unit Type of Package 2 | S01 |
| Number of Units in Package 2 | 24 |
| Package 2 Height | 15.000 cm |
| Package 2 Width | 15.000 cm |
| Package 2 Length | 40.000 cm |
| Package 2 Weight | 3.198 kg |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | <input checked="" type="checkbox"/> REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation | <input checked="" type="checkbox"/> China RoHS Declaration |
| RoHS exemption information | <input checked="" type="checkbox"/> Yes |
| Environmental Disclosure | <input checked="" type="checkbox"/> Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions


mm
in.

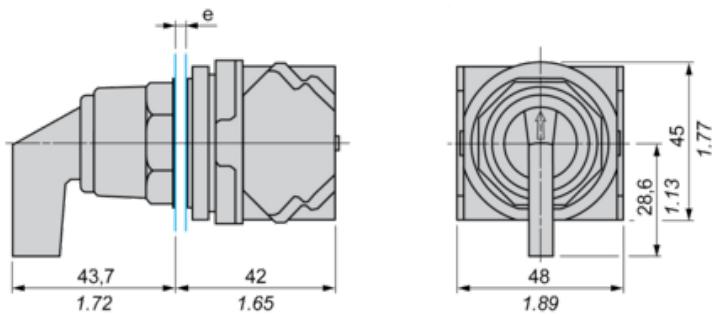

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Contact Block Mounting Position


Top and Rear views

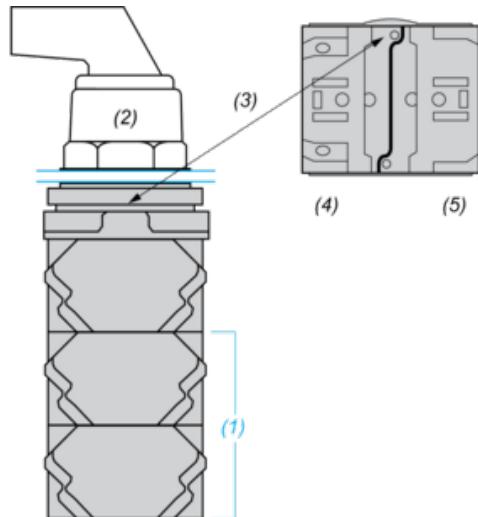

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2

Panel Cut-Out

Clearance

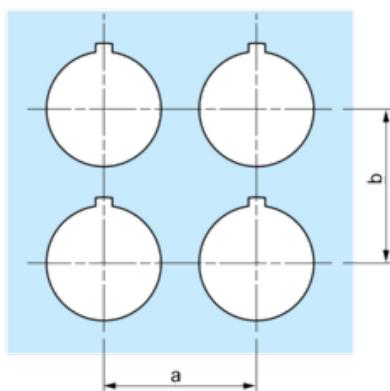

| Legend plate | a min. | | b min. | |
|--------------|--------|------|--------|------|
| | mm | in. | mm | in. |
| 9001KN2.. | 57.2 | 2.25 | 44.5 | 1.75 |
| 9001KN3.. | 57.2 | 2.25 | 50.8 | 2.00 |

Individual Cut-outs Details

2 alternatives

mm
in.

