

Product data sheet

Characteristics

9001KYSS1

Empty enclosure control station, Harmony 9001K, Harmony 9001SK, stainless steel, 1 cut out, 30mm



Main

| | |
|---------------------------|----------------------------------|
| Range of product | Harmony 9001SK Harmony 9001K |
| Product or component type | Empty enclosure |
| Device short name | 9001K |
| Number of cut-out | 1 cut-out |
| Cable entry | 1 entry tapped for 3/4" knockout |

Complementary

| | |
|---------------------|--|
| Product destination | For Ø 30 mm control and signalling units |
| Material | Stainless steel |
| Net weight | 1.06 kg |

Environment

| | |
|---------------------------------------|--|
| Protective treatment | TH |
| Ambient air temperature for storage | -40...70 °C |
| Ambient air temperature for operation | -25...70 °C |
| Overvoltage category | II conforming to IEC 61140 |
| NEMA degree of protection | NEMA 1 NEMA 12 NEMA 3 NEMA 4 NEMA 4X |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 14.224 cm |
| Package 1 Width | 13.97 cm |
| Package 1 Length | 16.256 cm |
| Package 1 Weight | 1.08 kg |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 6 |
| Package 2 Height | 30.0 cm |
| Package 2 Width | 30.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 7.097 kg |

Offer Sustainability


| | |
|----------------------------|--|
| REACH Regulation | <input checked="" type="checkbox"/> REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | <input checked="" type="checkbox"/> China RoHS Declaration |
| RoHS exemption information | <input checked="" type="checkbox"/> Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Below drawing shows a 3-hole enclosure. Refer to the product characteristics to get the number of holes

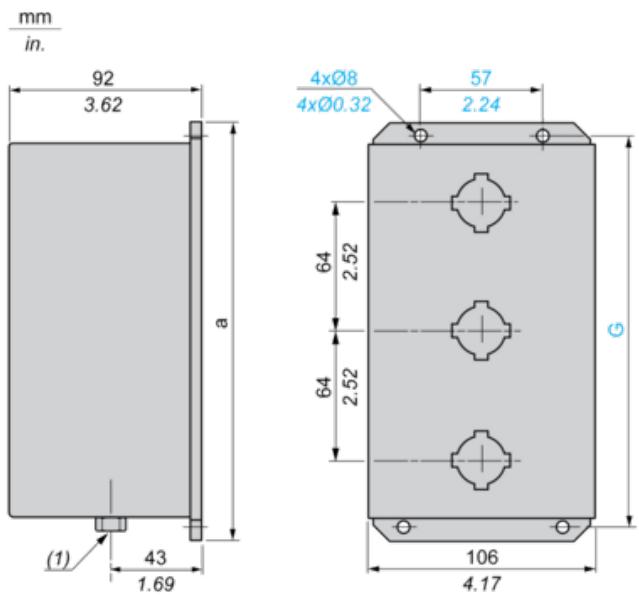

(1) Knockout conduit thread: 3/4".

| a | G | | |
|-----|------|-----|------|
| mm | in. | mm | in. |
| 133 | 5.24 | 117 | 4.61 |