

# Product data sheet

## Characteristics

### 9001KYSS4

Empty enclosure control station, Harmony 9001K, Harmony 9001SK, stainless steel, 4 cut outs, 30mm



#### Main

Range of product	Harmony 9001K Harmony 9001SK
Product or component type	Empty enclosure
Device short name	9001K
Number of cut-out	4 cut-outs
Cable entry	1 entry tapped for 3/4" knockout

#### Complementary

Product destination	For Ø 30 mm control and signalling units
Material	Stainless steel
Net weight	1.85 kg

#### Environment

Protective treatment	TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Overvoltage category	II conforming to IEC 61140
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 3 NEMA 4 NEMA 4X

#### Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.938 cm
Package 1 Width	9.906 cm
Package 1 Length	33.02 cm
Package 1 Weight	2.087 kg

#### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes

## Dimensions

Below drawing shows a 3-hole enclosure. Refer to the product characteristics to get the number of holes

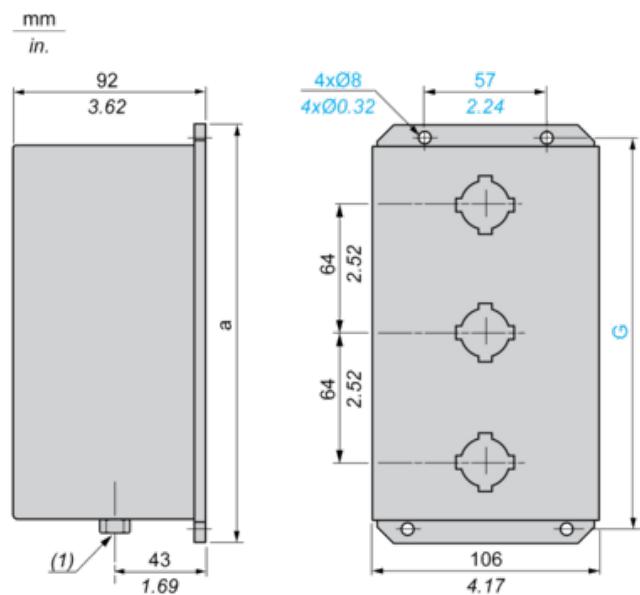

(1) Knockout conduit thread: 3/4".

a	G		
mm	in.	mm	in.
324	12.75	308	12.12