



**Main**

Range of product	Modicon X80
Product or component type	Relay discrete output module
Product specific application	For severe environments
Discrete output number	8 conforming to EN/IEC 61131-2
Discrete output logic	Positive or negative
Discrete output voltage	5...125 V 5...150 V DC 24...240 V 19...264 V AC

**Complementary**

Electrical connection	40 ways terminal block
Network frequency	50/60 Hz
Network frequency limits	47...63 Hz
Sensor power supply	5...150 V 19...264 V
[Ith] conventional free air thermal current	4 A 40 °C 3 A 50 °C 2 A 60 °C 1.2 A 70 °C
Insulation resistance	> 10 MΩ 500 V DC
Power dissipation in W	3.6 W
Response time on output	<= 10 ms activation <= 13 ms deactivation
Typical current consumption	40 mA at 3.3 V DC 101 mA at 24 V DC
MTBF reliability	2650000 H
Protection type	External short-circuit protection External overload protection External overvoltage protection, inductive AC network External overvoltage protection, inductive DC network
Output overload protection	Use 1 fast blow fuse per channel or group of channel
Output overvoltage protection	Use discharge diode on each output DC Use RC circuit on each output AC Use ZNO surge limiter on each output AC
Output short-circuit protection	Use 1 fast blow fuse per channel or group of channel
Minimum switching current	10 mA 5 V DC

---

**Electrical durability**

AC-12: 200000 cycles at 48 VA 24 V at -25...60 °C  
AC-12: 200000 cycles at 28.8 VA 24 V at 60...70 °C  
AC-12: 300000 cycles at 48 VA 48 V at -25...60 °C  
AC-12: 300000 cycles at 28.8 VA 48 V at 60...70 °C  
AC-12: 150000 cycles at 96 VA 48 V at -25...60 °C  
AC-12: 150000 cycles at 57.6 VA 48 V at 60...70 °C  
AC-12: 300000 cycles at 110 VA 100...120 V at -25...60 °C  
AC-12: 300000 cycles at 66 VA 100...120 V at 60...70 °C  
AC-12: 150000 cycles at 220 VA 100...120 V at -25...60 °C  
AC-12: 150000 cycles at 132 VA 100...120 V at 60...70 °C  
AC-12: 300000 cycles at 220 VA 200...250 V at -25...60 °C  
AC-12: 300000 cycles at 132 VA 200...250 V at 60...70 °C  
AC-12: 150000 cycles at 500 VA 200...250 V at -25...60 °C  
AC-12: 150000 cycles at 300 VA 200...250 V at 60...70 °C  
AC-15: 700000 cycles at 10 VA 24 V at -25...60 °C (load factor 0.4)  
AC-15: 700000 cycles at 6 VA 24 V at 60...70 °C (load factor 0.4)  
AC-15: 500000 cycles at 24 VA 24 V at -25...60 °C (load factor 0.4)  
AC-15: 500000 cycles at 14.4 VA 24 V at 60...70 °C (load factor 0.4)  
AC-15: 200000 cycles at 48 VA 24 V at -25...60 °C (load factor 0.4)  
AC-15: 200000 cycles at 28.8 VA 24 V at 60...70 °C (load factor 0.4)  
AC-15: 700000 cycles at 10 VA 48 V at -25...60 °C (load factor 0.4)  
AC-15: 700000 cycles at 6 VA 48 V at 60...70 °C (load factor 0.4)  
AC-15: 500000 cycles at 24 VA 48 V at -25...60 °C (load factor 0.4)  
AC-15: 500000 cycles at 14.4 VA 48 V at 60...70 °C (load factor 0.4)  
AC-15: 300000 cycles at 48 VA 48 V at -25...60 °C (load factor 0.4)  
AC-15: 300000 cycles at 28.8 VA 48 V at 60...70 °C (load factor 0.4)  
AC-15: 100000 cycles at 96 VA 48 V at -25...60 °C (load factor 0.4)  
AC-15: 100000 cycles at 57.6 VA 48 V at 60...70 °C (load factor 0.4)  
AC-15: 1000000 cycles at 10 VA 100...120 V at -25...60 °C (load factor 0.4)  
AC-15: 1000000 cycles at 6 VA 100...120 V at 60...70 °C (load factor 0.4)  
AC-15: 300000 cycles at 50 VA 100...120 V at -25...60 °C (load factor 0.4)  
AC-15: 300000 cycles at 30 VA 100...120 V at 60...70 °C (load factor 0.4)  
AC-15: 200000 cycles at 110 VA 100...120 V at -25...60 °C (load factor 0.4)  
AC-15: 200000 cycles at 66 VA 100...120 V at 60...70 °C (load factor 0.4)  
AC-15: 70000 cycles at 220 VA 100...120 V at -25...60 °C (load factor 0.4)  
AC-15: 70000 cycles at 132 VA 100...120 V at 60...70 °C (load factor 0.4)  
AC-15: 1000000 cycles at 10 VA 200...250 V at -25...60 °C (load factor 0.4)  
AC-15: 1000000 cycles at 6 VA 200...250 V at 60...70 °C (load factor 0.4)  
AC-15: 500000 cycles at 50 VA 200...250 V at -25...60 °C (load factor 0.4)  
AC-15: 500000 cycles at 30 VA 200...250 V at 60...70 °C (load factor 0.4)  
AC-15: 200000 cycles at 110 VA 200...250 V at -25...60 °C (load factor 0.4)  
AC-15: 200000 cycles at 66 VA 200...250 V at 60...70 °C (load factor 0.4)  
AC-15: 150000 cycles at 220 VA 200...250 V at -25...60 °C (load factor 0.4)  
AC-15: 150000 cycles at 132 VA 200...250 V at 60...70 °C (load factor 0.4)  
DC-12: 200000 cycles at 24 W 24 V at -25...60 °C  
DC-12: 200000 cycles at 14.4 W 24 V at 60...70 °C  
DC-12: 150000 cycles at 48 W 24 V at -25...60 °C  
DC-12: 150000 cycles at 28.8 W 24 V at 60...70 °C  
DC-12: 150000 cycles at 40 W 48...60 V at -25...60 °C  
DC-12: 150000 cycles at 24 W 48...60 V at 60...70 °C  
DC-12: 100000 cycles at 45 W 100...125 V at -25...60 °C  
DC-12: 60000 cycles at 45 W 100...125 V at 60...70 °C  
DC-13: 100000 cycles at 10 W 24 V at -25...60 °C  
DC-13: 100000 cycles at 6 W 24 V at 60...70 °C  
DC-13: 60000 cycles at 24 W 24 V at -25...60 °C  
DC-13: 60000 cycles at 14.4 W 24 V at 60...70 °C  
DC-13: 40000 cycles at 48 W 24 V at -25...60 °C  
DC-13: 40000 cycles at 28.8 W 24 V at 60...70 °C  
DC-13: 40000 cycles at 40 W 48...60 V at -25...60 °C  
DC-13: 40000 cycles at 24 W 48...60 V at 60...70 °C  
DC-13: 100000 cycles at 15 W 100...125 V at -25...60 °C  
DC-13: 40000 cycles at 15 W 100...125 V at 60...70 °C

---

**Status LED**

1 LED (green) RUN  
1 LED per channel (green) channel diagnostic  
1 LED (red) ERR  
1 LED (red) I/O

---

**Net weight**

0.189 kg

---

## Environment

IP degree of protection	IP20
Environmental characteristic	Gas resistant class Gx Gas resistant class 3C4 Dust resistant class 3S4 Sand resistant class 3S4 Salt resistant level 2 Mold growth resistant class 3B2 Fungal spore resistant class 3B2
Dielectric strength	1780 V AC at 50/60 Hz 1 min
Vibration resistance	3 gn
Shock resistance	30 gn
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-25...70 °C
Relative humidity	0...95 % at -25...70 °C without condensation
Protective treatment	Conformal coating
Operating altitude	0...2000 m 2000...5000 m with derating factor




## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	17.900 cm
Package 1 Length	26.100 cm
Package 1 Weight	356.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.332 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

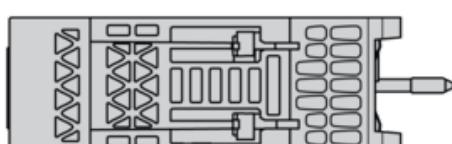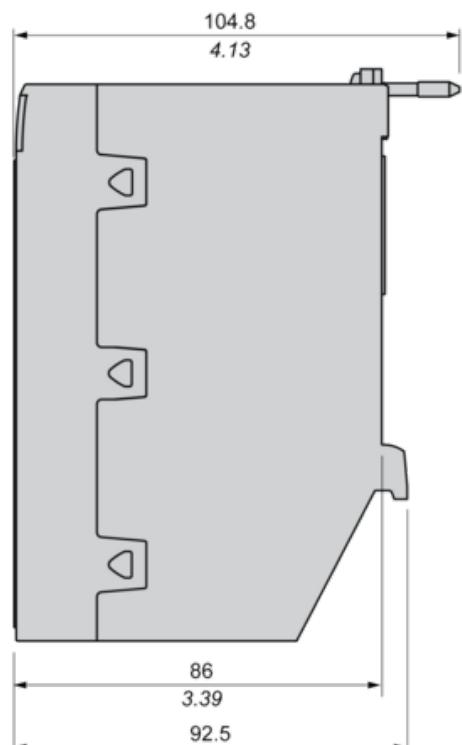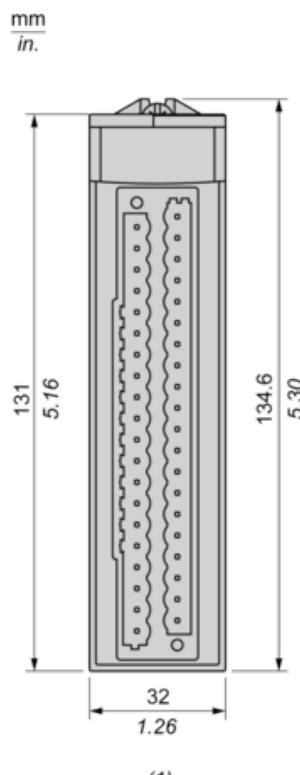

(3)


- (1) Front view
- (2) Right view
- (3) Top view

---

### Connecting the Module

---

#### Output Circuit Diagram

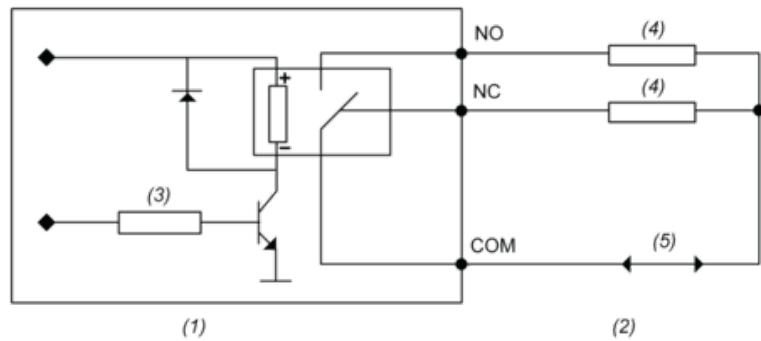

(1) Module

(2) Output

(3) Command


(4) Pre-actuator

(5) Power supply

NO : Normally open output

NC : Normally closed output

## Module Connection

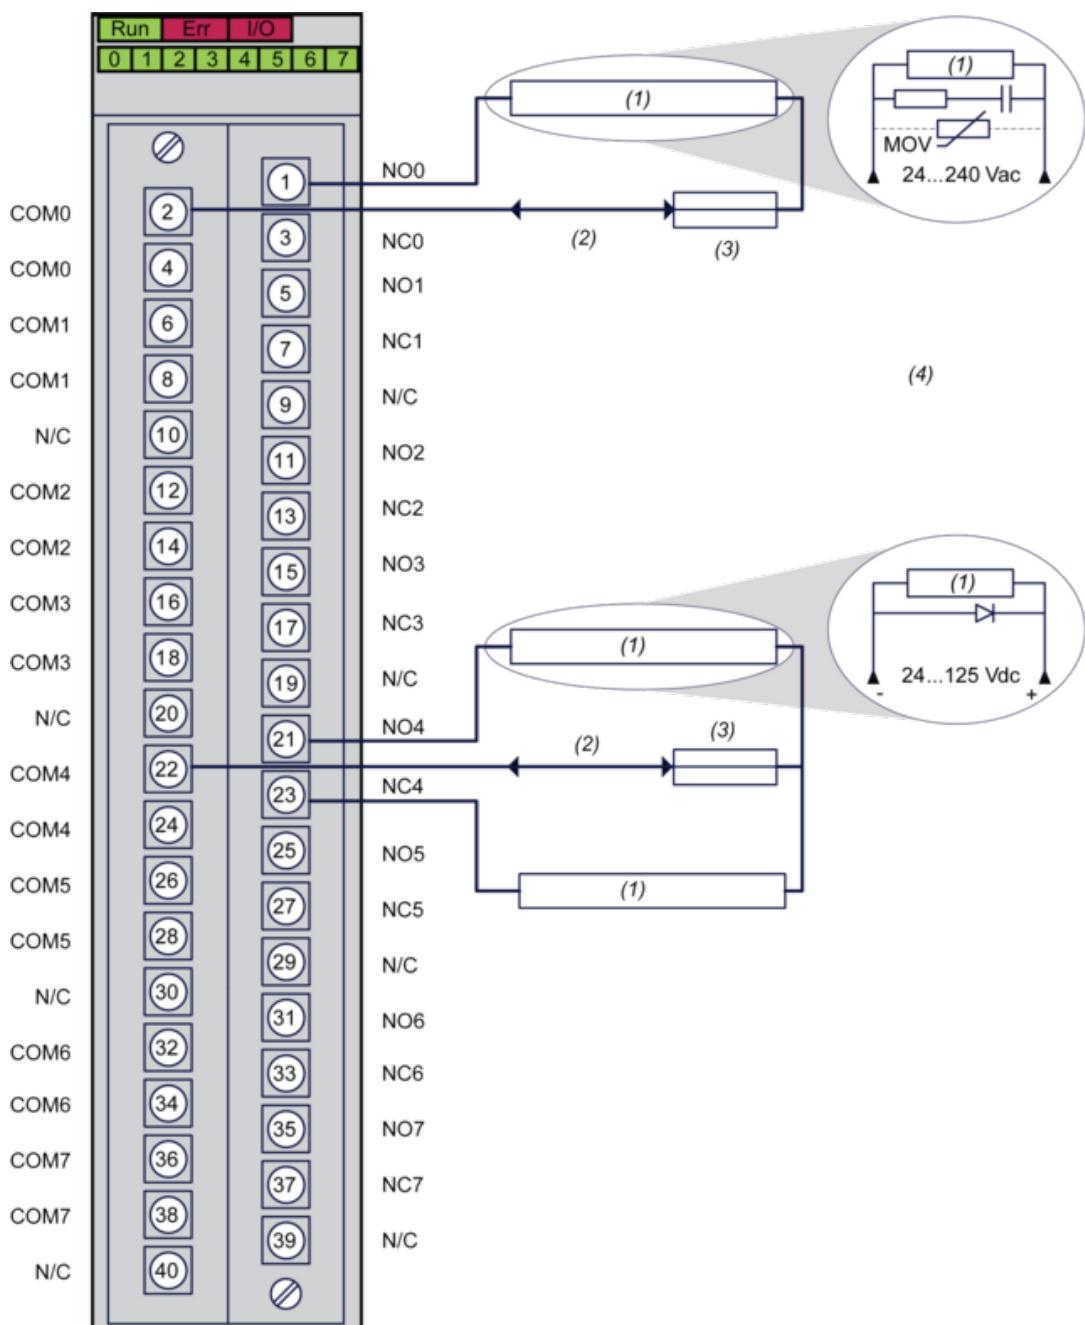

(1) Pre-actuator

(2) Power supply : 24...125 Vdc or 24...240 Vac

(3) Fuse : Use appropriate fast-blow fuse for each relay

(4) We recommend installing this type of protection on the terminals of each pre-actuator

N/C : Not connected