



## Main

|                           |                                            |
|---------------------------|--------------------------------------------|
| Range of product          | Lexium integrated drive                    |
| Product or component type | Motion integrated drive                    |
| Device short name         | ILS                                        |
| Motor type                | 3-phase stepper motor                      |
| Number of motor poles     | 6                                          |
| Network number of phases  | Single phase                               |
| [Us] rated supply voltage | 24 V<br>36 V                               |
| Network type              | DC                                         |
| Communication interface   | I/O for motion sequence, integrated        |
| Length                    | 170.6 mm                                   |
| Winding type              | Medium speed of rotation and medium torque |
| Electrical connection     | Printed circuit board connector            |
| Holding brake             | Without                                    |
| Gear box type             | Without                                    |
| Nominal speed             | 100 rpm at 24 V<br>200 rpm at 36 V         |
| Nominal torque            | 4 N.m                                      |
| Holding torque            | 4 N.m                                      |

## Complementary

|                                       |                                                                                                                              |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Transmission rate                     | 9.6, 19.2 and 38.4 kbauds                                                                                                    |
| Mounting support                      | Flange                                                                                                                       |
| Motor flange size                     | 85 mm                                                                                                                        |
| Number of motor stacks                | 2                                                                                                                            |
| Centring collar diameter              | 60 mm                                                                                                                        |
| Centring collar depth                 | 2 mm                                                                                                                         |
| Number of mounting holes              | 4                                                                                                                            |
| Mounting holes diameter               | 6.5 mm                                                                                                                       |
| Circle diameter of the mounting holes | 99 mm                                                                                                                        |
| Feedback type                         | Index pulse                                                                                                                  |
| Shaft end                             | Untapped                                                                                                                     |
| Second shaft                          | Without second shaft end                                                                                                     |
| Shaft diameter                        | 12 mm                                                                                                                        |
| Shaft length                          | 30 mm                                                                                                                        |
| Supply voltage limits                 | 18...40 V                                                                                                                    |
| Current consumption                   | 5000 mA maximum continuous                                                                                                   |
| Associated fuse rating                | 10 A                                                                                                                         |
| Commissioning interface               | RS485 (9.6, 19.2 and 38.4 kbauds)                                                                                            |
| Input/output type                     | 4 signals (each be used as input or output)                                                                                  |
| Voltage state 0 guaranteed            | -3...4.5 V                                                                                                                   |
| Voltage state 1 guaranteed            | 15...30 V                                                                                                                    |
| Discrete input current                | 10 MA at 24 V on/STO_A for safety input<br>3 MA at 24 V on/STO_B for safety input<br>10 mA at 24 V for 24 V signal interface |

|                           |                                                                                      |
|---------------------------|--------------------------------------------------------------------------------------|
| Discrete output voltage   | 10...30 V                                                                            |
| Maximum switching current | 100 mA per output<br>200 mA total                                                    |
| Protection type           | Overload of output voltage<br>Short circuit of the output voltage<br>Safe torque off |
| Peak stall torque         | 4 N.m                                                                                |
| Continuous stall torque   | 4 N.m                                                                                |
| Speed feedback resolution | 20000 points/turn                                                                    |
| Accuracy error            | +/- 6 arc min                                                                        |
| Rotor inertia             | 2.2 kg.cm <sup>2</sup>                                                               |
| Maximum mechanical speed  | 1500 rpm                                                                             |
| Maximum radial force Fr   | 100 N                                                                                |
| Maximum axial force Fa    | 170 N (tensile force)<br>30 N (force pressure)                                       |
| Service life in hours     | 20000 h bearing                                                                      |
| Marking                   | CE                                                                                   |
| Type of cooling           | Natural convection                                                                   |
| Net weight                | 3.6 kg                                                                               |

## Environment

|                                                       |                                                                                                                                               |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Standards                                             | EN 50347<br>EN/IEC 61800-3<br>IEC 60072-1<br>IEC 61800-3, Ed 2<br>EN 61800-3:2001, second environment<br>EN 61800-3 : 2001-02<br>EN/IEC 50178 |
| Product certifications                                | UL[RETURN]TÜV[RETURN]cUL                                                                                                                      |
| Ambient air temperature for operation                 | 50...65 °C (with power derating of 2 % per °C)<br>0...50 °C (without derating)                                                                |
| Permissible ambient air temperature around the device | 110 °C motor                                                                                                                                  |
| Ambient air temperature for storage                   | -25...70 °C                                                                                                                                   |
| Operating altitude                                    | <= 1000 m without derating                                                                                                                    |
| Relative humidity                                     | 15...85 % without condensation                                                                                                                |
| Vibration resistance                                  | 20 m/s <sup>2</sup> (f= 10...500 Hz) 10 cycles conforming to EN/IEC 60068-2-6                                                                 |
| Shock resistance                                      | 150 m/s <sup>2</sup> 1000 shocks conforming to EN/IEC 60068-2-29                                                                              |
| IP degree of protection                               | IP41 shaft bushing: conforming to EN/IEC 60034-5<br>IP54 total except shaft bushing: conforming to EN/IEC 60034-5                             |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Height             | 10.5 cm |
| Package 1 Width              | 19.0 cm |
| Package 1 Length             | 39.0 cm |
| Package 1 Weight             | 4.0 kg  |


## Offer Sustainability

|                            |                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                             |
| REACH Regulation           |  <a href="#">REACH Declaration</a>             |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)                                                                        |
| Mercury free               | Yes                                                                                                                               |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>        |
| RoHS exemption information |  <a href="#">Yes</a>                           |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a> |

|                             |                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Circularity Profile         | <a href="#">End Of Life Information</a>                                                                                     |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                    | Yes                                                                                                                         |
| <b>Contractual warranty</b> |                                                                                                                             |
| Warranty                    | 18 months                                                                                                                   |


Integrated Drive without Holding Brake

Dimensions

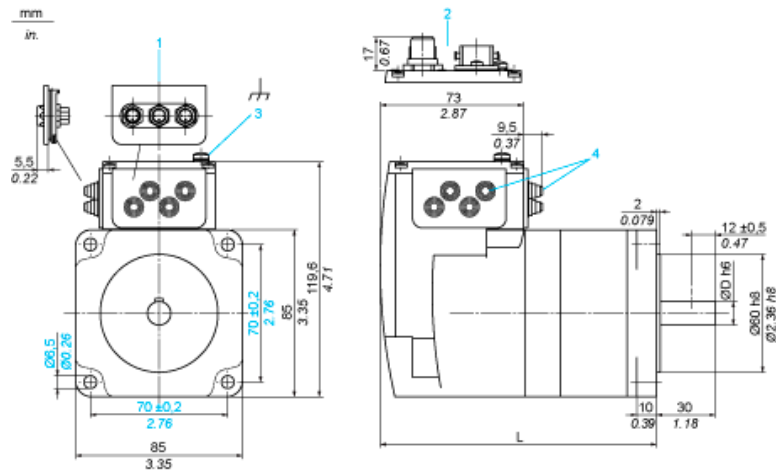

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries  $\varnothing = 3 \dots 9 \text{ mm}/0.12 \dots 0.35 \text{ in.}$
- L 170.6 mm/6.72 in.
- D 12 mm/0.47 in.

### Connection Example with 4 I/O Signals

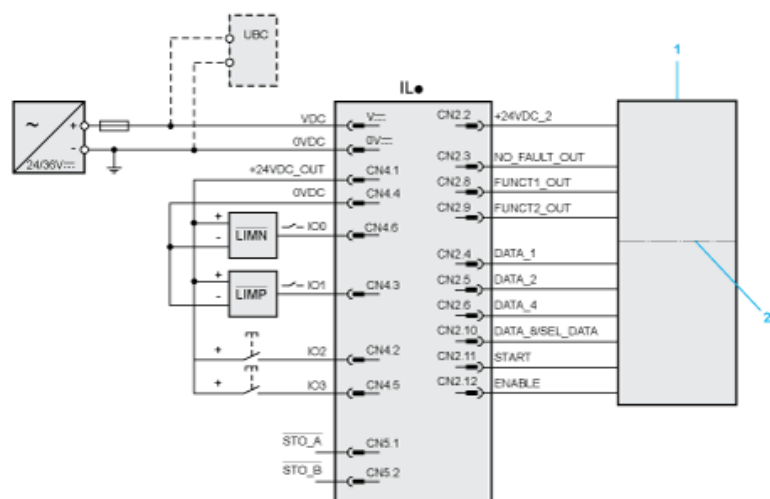


- 1 PLC
- 2 Galvanic isolation

---

### Torque Characteristics

---

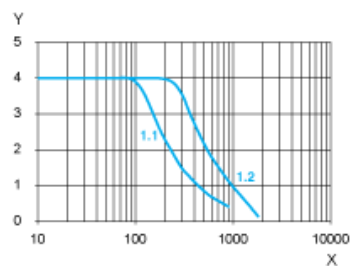

X Speed of rotation in rpm

Y Torque in Nm

1.1 Max. torque at 24 V

1.2 Max. torque at 36 V