



Main

| | |
|---------------------------|--|
| Range of product | Lexium integrated drive |
| Product or component type | Motion integrated drive |
| Device short name | ILS |
| Motor type | 3-phase stepper motor |
| Number of motor poles | 6 |
| Network number of phases | Single phase |
| [Us] rated supply voltage | 24 V 36 V |
| Network type | DC |
| Communication interface | RS485, integrated |
| Length | 170.6 mm |
| Winding type | Medium speed of rotation and medium torque |
| Electrical connection | Industrial connector |
| Holding brake | Without |
| Gear box type | Without |
| Nominal speed | 100 rpm at 24 V 200 rpm at 36 V |
| Nominal torque | 4 N.m |
| Holding torque | 4 N.m |

Complementary

| | |
|---------------------------------------|---|
| Transmission rate | 9.6, 19.2 and 38.4 kbauds |
| Mounting support | Flange |
| Motor flange size | 85 mm |
| Number of motor stacks | 2 |
| Centring collar diameter | 60 mm |
| Centring collar depth | 2 mm |
| Number of mounting holes | 4 |
| Mounting holes diameter | 6.5 mm |
| Circle diameter of the mounting holes | 99 mm |
| Feedback type | Index pulse |
| Shaft end | Untapped |
| Second shaft | Without second shaft end |
| Shaft diameter | 12 mm |
| Shaft length | 30 mm |
| Supply voltage limits | 18...40 V |
| Current consumption | 5000 mA maximum |
| Associated fuse rating | 10 A |
| Input/output type | 4 signals (each be used as input or output) |
| Voltage state 0 guaranteed | -3...4.5 V |
| Voltage state 1 guaranteed | 15...30 V |
| Discrete input current | 10 MA at 24 V on/STO_A for safety input 3 MA at 24 V on/STO_B for safety input 2 mA at 24 V for 24 V signal interface |
| Discrete output voltage | 23...25 V |

| | |
|---------------------------|--|
| Maximum switching current | 100 MA per output 200 mA total |
| Protection type | Overload of output voltage Safe torque off Short circuit of the output voltage |
| Peak stall torque | 4 N.m |
| Continuous stall torque | 4 N.m |
| Speed feedback resolution | 20000 points/turn |
| Accuracy error | +/- 6 arc min |
| Rotor inertia | 2.2 kg.cm ² |
| Maximum mechanical speed | 1500 rpm |
| Maximum radial force Fr | 100 N |
| Maximum axial force Fa | 170 N (tensile force) 30 N (force pressure) |
| Service life in hours | 20000 h bearing |
| Marking | CE |
| Type of cooling | Natural convection |
| Net weight | 3.6 kg |

Environment

| | |
|---|---|
| Standards | EN 50347 EN/IEC 50178 IEC 60072-1 EN 61800-3 : 2001-02 EN 61800-3:2001, second environment EN/IEC 61800-3 IEC 61800-3, Ed 2 |
| Product certifications | cUL[RETURN]TÜV[RETURN]UL |
| Ambient air temperature for operation | 50...65 °C (with power derating of 2 % per °C) 0...50 °C (without derating) |
| Permissible ambient air temperature around the device | 105 °C power amplifier 110 °C motor |
| Ambient air temperature for storage | -25...70 °C |
| Operating altitude | <= 1000 m without derating |
| Relative humidity | 15...85 % without condensation |
| Vibration resistance | 20 m/s ² (f= 10...500 Hz) 10 cycles conforming to EN/IEC 60068-2-6 |
| Shock resistance | 150 m/s ² 1000 shocks conforming to EN/IEC 60068-2-29 |
| IP degree of protection | IP41 shaft bushing: conforming to EN/IEC 60034-5 IP54 total except shaft bushing: conforming to EN/IEC 60034-5 |

Packing Units

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 10.5 cm |
| Package 1 Width | 19.0 cm |
| Package 1 Length | 39.0 cm |
| Package 1 Weight | 4.0 kg |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation |  REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation |  China RoHS Declaration |
| RoHS exemption information |  Yes |
| Environmental Disclosure |  Product Environmental Profile |

Circularity Profile

 [End Of Life Information](#)

WEEE

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty

18 months

Integrated Drive without Holding Brake

Dimensions




- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries $\varnothing = 3 \dots 9 \text{ mm} / 0.12 \dots 0.35 \text{ in.}$
- L 170.6 mm/6.72 in.
- D 12 mm/0.47 in.

Connection Example with 4 I/O Signals



Torque Characteristics

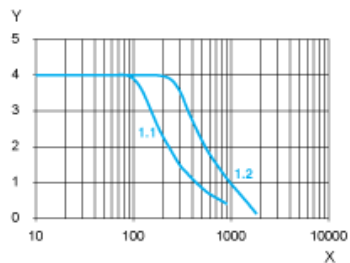

- X Speed of rotation in rpm
Y Torque in Nm
1.1 Max. torque at 24 V
1.2 Max. torque at 36 V