


Product data sheet

Characteristics

KRA1250RT43

Adaptor, Canalis KRA, aluminium, 1250A, 3L +PE, fixed length 600mm, interconnection with Canalis KTA 3L+PE

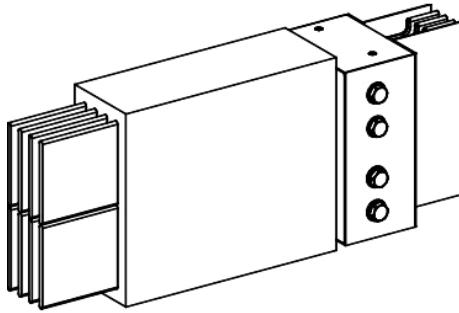

Main

| | |
|--------------------------------|-------------------------------|
| Range | Canalis |
| Product name | KR |
| Product or component type | Adaptor |
| Device short name | KRA |
| Range compatibility | Canalis KRA Canalis KTA |
| Material | Aluminium |
| [Ie] rated operational current | 1250 A at 35 °C |
| Polarity | 3L + N or 3L + PE or 3L + PEN |
| Length | 600 mm |

Complementary

| | |
|--|---|
| Accessory / separate part category | Adaptation accessory |
| Housing material | Mineral epoxy resin |
| Contacts material | Tinned aluminium |
| [Ue] rated operational voltage | 1000 V |
| Network frequency | 50/60 Hz |
| [Ui] rated insulation voltage | 1000 V |
| [Icw] rated short-time withstand current | 53 kA |
| [Ipk] rated peak withstand current | 117 kA |
| Radiated magnetic field | 14.68 mT |
| Thermal stress limit | 2809000 kA ² .s |
| Maximum voltage drop | <0.0102 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.013 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0134 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0133 V with power factor = 0.7 at 50 Hz with 1A for 100 m long |
| Mounting location | Indoor use only |
| Installation direction | Horizontal Vertical |
| Earth conductor | Standard earth |
| Product certifications | EAC[RETURN]ATEX[RETURN]CE |
| Standards | IEC 61439-6 |
| Width | KT: 140 mm KR: 100 mm |
| Height | KR: 130 mm KT: 124 mm |
| Colour | Grey (RAL 7030) |
| Linear load | 34 kg/m |

Environment

| | |
|------------------------------|---|
| IP degree of protection | IP55 conforming to IEC 60529 |
| IK degree of protection | IK08 conforming to IEC 62262 |
| Pollution degree | 3 |
| Fire resistance | 760 °C 180 min conforming to IEC 60331-1 |
| Derating factor | 0...35 °C (100 % of In) 35...40 °C (96 % of In) 40...45 °C (89 % of In) 45...50 °C (84 % of In) 50...55 °C (78 % of In) |
| Operating altitude | 1000 m 100 % of In (indoor) 2000 m 99 % of In (indoor) 3000 m 96 % of In (indoor) 4000 m 90 % of In (indoor) 1000 m 98 % of In (outdoor) 2000 m 94 % of In (outdoor) 3000 m 89 % of In (outdoor) 4000 m 83 % of In (outdoor) |
| Environmental characteristic | EMC directive conforming to IEC 61439-6 |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 13 cm |
| Package 1 Width | 10 cm |
| Package 1 Length | 60 cm |
| Package 1 Weight | 21.42 kg |

Offer Sustainability

| | |
|-----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation |  REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant  EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation |  China RoHS Declaration |
| RoHS exemption information |  Yes |
| Environmental Disclosure |  Product Environmental Profile |
| Circularity Profile |  End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free product |