


# KRA1600ZC5

Edgewise zed unit, Canalis KRA, aluminium, 1600A, 3L+N°PE, made to measure, grey RAL7030

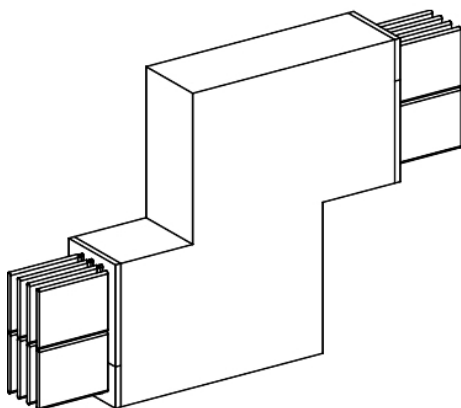

## Main

|                                |                                                                                                                                                 |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                          | Canalis                                                                                                                                         |
| Product name                   | KR                                                                                                                                              |
| Product or component type      | Zed elbow                                                                                                                                       |
| Device short name              | KRA                                                                                                                                             |
| Product specific application   | Enterprise data centres<br>Healthcare<br>Real estate and office buildings<br>Mining minerals and metals<br>Oil and gas<br>Water and waste water |
| Device application             | Change direction                                                                                                                                |
| Material                       | Aluminium                                                                                                                                       |
| [Ie] rated operational current | 1600 A at 35 °C                                                                                                                                 |
| Polarity                       | 3L + N + PE                                                                                                                                     |
| Earth conductor                | Standard earth                                                                                                                                  |
| Short-circuit level            | Standard version                                                                                                                                |

## Complementary

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing material                         | Mineral epoxy resin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Contacts material                        | Tinned aluminium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| [Ue] rated operational voltage           | 1000 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Network frequency                        | 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [Ui] rated insulation voltage            | 1000 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| [Icw] rated short-time withstand current | 53 kA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| [Ipk] rated peak withstand current       | 117 kA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Radiated magnetic field                  | 17.3 mT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Thermal stress limit                     | 2809000 kA².s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Maximum voltage drop                     | <0.0062 V with power factor = 1 at 50 Hz with 1A for 100 m long<br><0.0091 V with power factor = 0.9 at 50 Hz with 1A for 100 m long<br><0.0098 V with power factor = 0.8 at 50 Hz with 1A for 100 m long<br><0.0101 V with power factor = 0.7 at 50 Hz with 1A for 100 m long                                                                                                                                                                                                                                                       |
| Linear resistance                        | L: R20 20 °C= 0.03 mΩ/m<br>L: R1 35 °C= 0.036 mΩ/m at Inc and 50 Hz<br>L: X1 35 °C= 0.046 mΩ/m at Inc and 50 Hz<br>L: Z1 35 °C= 0.059 mΩ/m at Inc and 50 Hz<br>L - PE: R0 20 °C= 0.097 mΩ/m symmetrical components method<br>L - PE: X0 20 °C= 0.22 mΩ/m symmetrical components method<br>L - PE: Z0 20 °C= 0.24 mΩ/m symmetrical components method<br>L-N: R0 20 °C= 0.073 mΩ/m symmetrical components method<br>L-N: X0 20 °C= 0.091 mΩ/m symmetrical components method<br>L-N: Z0 20 °C= 0.117 mΩ/m symmetrical components method |
| Mounting location                        | Indoor<br>Outdoor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Product certifications                   | EAC[RETURN]ATEX[RETURN]CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Standards                                | IEC 61439-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Width                                    | 120 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Height                                   | 190 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Colour                                   | Grey (RAL 7030)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| Length      | Direction 1: 350...700 mm<br>Direction 2: 10...700 mm<br>Direction 3: 350...700 mm |
| Linear load | 58 kg/m                                                                            |

## Environment

|                              |                                                                                                                                                                                                                                                   |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection      | IP68 conforming to IEC 60529                                                                                                                                                                                                                      |
| IK degree of protection      | IK10 conforming to IEC 62262                                                                                                                                                                                                                      |
| Pollution degree             | 3                                                                                                                                                                                                                                                 |
| Fire resistance              | 760 °C 180 min conforming to IEC 60331-1                                                                                                                                                                                                          |
| Derating factor              | 0...35 °C (100 % of In)<br>35...40 °C (96 % of In)<br>40...45 °C (89 % of In)<br>45...50 °C (84 % of In)<br>50...55 °C (78 % of In)                                                                                                               |
| Operating altitude           | 1000 m 100 % of In (indoor)<br>2000 m 99 % of In (indoor)<br>3000 m 96 % of In (indoor)<br>4000 m 90 % of In (indoor)<br>1000 m 98 % of In (outdoor)<br>2000 m 94 % of In (outdoor)<br>3000 m 89 % of In (outdoor)<br>4000 m 83 % of In (outdoor) |
| Environmental characteristic | EMC directive conforming to IEC 61439-6                                                                                                                                                                                                           |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 40.0 cm  |
| Package 1 Width              | 50.0 cm  |
| Package 1 Length             | 50.0 cm  |
| Package 1 Weight             | 85.26 kg |

## Offer Sustainability

|                             |                                                                                                                                   |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status    | Green Premium product                                                                                                             |
| REACH Regulation            |  <a href="#">REACH Declaration</a>             |
| REACH free of SVHC          | Yes                                                                                                                               |
| EU RoHS Directive           | Compliant  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free      | Yes                                                                                                                               |
| Mercury free                | Yes                                                                                                                               |
| China RoHS Regulation       |  <a href="#">China RoHS Declaration</a>        |
| RoHS exemption information  |  <a href="#">Yes</a>                           |
| Environmental Disclosure    |  <a href="#">Product Environmental Profile</a> |
| Circularity Profile         |  <a href="#">End Of Life Information</a>       |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins       |
| Halogen content performance | Halogen free product                                                                                                              |