


Product data sheet

Characteristics

KRA5000ZA45

Vertical wall spring support, Canalis KRA, vertical busbar trunking (aluminium), 5000A, 3 or 4 conductors busbar

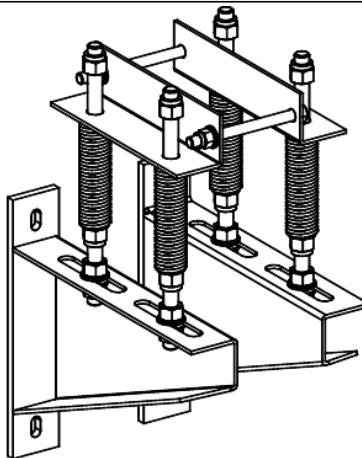

Main

Range	Canalis
Product name	KR
Product or component type	Spring support
Device short name	KRA

Complementary

Accessory / separate part category	Support accessory
Fixing device mounting	Wall mounting
Mounting position	Vertical
[Ie] rated operational current	5000 A with aluminium
Busbar trunking polarity	3L 3L + N or 3L + PE or 3L + PEN
Material	Stainless steel 316
Standards	IEC 61439-2 IEC 61439-6
Width	100 mm
Quantity per set	Set of 1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	59.5 cm
Package 1 Width	23.0 cm
Package 1 Length	60.0 cm
Package 1 Weight	25.59 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product
