


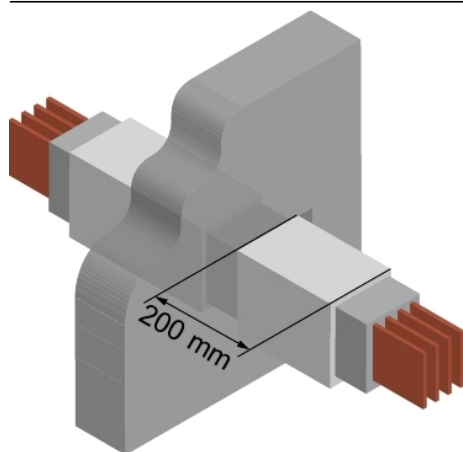

Main

Range	Canalis
Product name	KR
Product or component type	Busbar cover
Busbar description	Fire barrier
Device short name	KRB
Range compatibility	Canalis KR KRA[RETURN]Canalis KR KRC
Device application	Feeder length
[Ie] rated operational current	800 A with aluminium 1000 A with copper
Busbar trunking polarity	3L + N or 3L + PE or 3L + PEN 3L + N + PE 3L
Length	550 mm

Complementary

Accessory / separate part category	Fire protection accessory
[Ui] rated insulation voltage	1000 V
Mounting mode	Surface mounted
Product certifications	CE[RETURN]ATEX[RETURN]EAC
Standards	IEC 61439-6
Thickness	20 mm
Height	130 mm
Width	130 mm
Colour	Grey (RAL 7030)
Quantity per set	1

Environment

IP degree of protection	IP68 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Pollution degree	3
Fire resistance	0 °C 120 min conforming to DIN 4102-9

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.0 cm
Package 1 Width	9.0 cm
Package 1 Length	70.0 cm
Package 1 Weight	4.85 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product