


Product data sheet

Characteristics

KRB0540ZA1

Horizontal flat support, Canalis KR, flatwise busbar trunking, 5000A for Canalis KRA (aluminium), 6300A for Canalis KRC

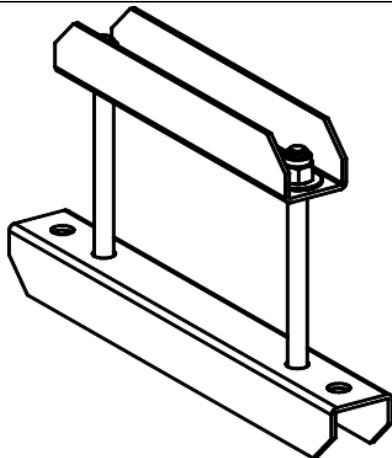

Main

Range	Canalis
Product name	KR
Product or component type	Flat support
Device short name	KRB
Device composition	Threaded rod Support

Complementary

Accessory / separate part category	Support accessory
Fixing device mounting	Suspended on threaded rod
Mounting position	Horizontal
[Ie] rated operational current	5000 A with aluminium 6300 A with copper
Busbar trunking polarity	3L + N + PE 3L 3L + N or 3L + PE or 3L + PEN
Material	Stainless steel 316
Standards	IEC 61439-2 IEC 61439-6
Height	540 mm
Quantity per set	Set of 1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	20.0 cm
Package 1 Width	70.0 cm
Package 1 Length	4.5 cm
Package 1 Weight	4.14 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes

Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product
