


# KSB125HD502

Tap off unit, Canalis KS 100A to 1000A, for switch disconnecter FuPacT ISFT, 125A, 3L +PEN, IP55, RAL9001

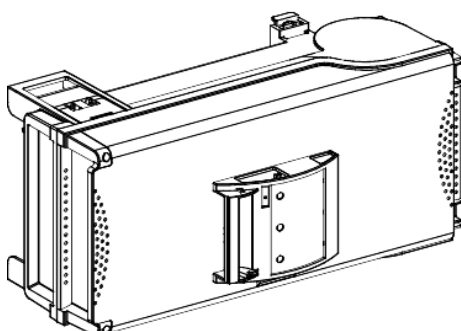

## Main

|                                |                                                           |
|--------------------------------|-----------------------------------------------------------|
| Range of product               | Canalis                                                   |
| Range compatibility            | Canalis KS busbar trunking                                |
| Product or component type      | Tap-off unit                                              |
| Busbar trunking compatibility  | Canalis KS busbar trunkingplug-in                         |
| [Ie] rated operational current | 125 A at 35 °C                                            |
| Protection type                | FuPacT ISFT switch-disconnector fuse: DIN fuse, size NH00 |
| Provided equipment             | fuse                                                      |
| Mounting mode                  | Plug-in with auto-clamping system                         |
| Colour                         | White (RAL 9001)                                          |

## Complementary

|                                |                            |
|--------------------------------|----------------------------|
| Device application             | High power distribution    |
| [Ue] rated operational voltage | 500 V                      |
| [Ui] rated insulation voltage  | 500 V                      |
| Electrical connection          | Cable gland - ISO63 (x2)   |
| Standards                      | IEC 61439-1<br>IEC 61439-6 |
| Body material                  | Plastic                    |

## Environment

|                         |                              |
|-------------------------|------------------------------|
| IP degree of protection | IP20 conforming to IEC 60529 |
| IK degree of protection | IK08 conforming to IEC 62262 |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 21.0 cm  |
| Package 1 Width              | 24.0 cm  |
| Package 1 Length             | 45.5 cm  |
| Package 1 Weight             | 3.873 kg |

## Offer Sustainability

|                            |                                               |
|----------------------------|-----------------------------------------------|
| Sustainable offer status   | Green Premium product                         |
| REACH Regulation           | <a href="#">REACH Declaration</a>             |
| EU RoHS Directive          | Compliant with Exemptions                     |
| Mercury free               | Yes                                           |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>        |
| RoHS exemption information | <a href="#">Yes</a>                           |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a> |

|                     |                                                                                                                             |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Circularity Profile | No need of specific recycling operations                                                                                    |
| WEEE                | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |