


KTA2000SL71

Coupling isolator, Canalis KTA, aluminium,
2000A, 3L+N+PER (Cu), high Icw, ComPact
INV2000 switch disconnecter

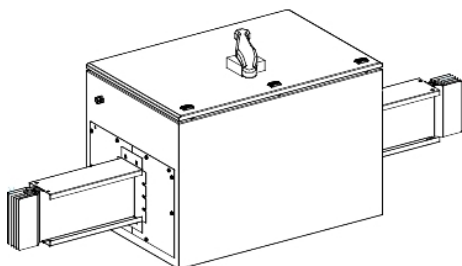

Main

Range	Canalis
Product name	KT
Product or component type	Coupling switch
Product compatibility	Canalis KTA busbar trunking 2000 A Compact INV switch disconnecter 2000 A
Device application	Isolation
Material	Aluminium
[Ie] rated operational current	1000 A at 35 °C
Busbar trunking polarity	3L + N + PE
Neutral position	Right
PE conductor	Reinforced
Icw short-circuit version	Reinforced version
Busbar position	Edgewise Flat
Provided equipment	Switch disconnecter Handle Enclosure
Switch disconnecter control type	Rotary handle
Colour	White (RAL 9001)

Complementary

[Ue] rated operational voltage	1000 V
Network type	AC
Network frequency	50/60 Hz
[Ui] rated insulation voltage	1000 V
Dimension type	Fix
Busbar length	2000 mm
Busbar width	140 mm
Busbar height	204 mm
Linear load	31 kg/m
Cubicle length	900 mm
Cubicle width	600 mm
Cubicle height	608 mm
[Icw] rated short-time withstand current	110 kA during 1 s
[Ipk] rated peak withstand current	242 kA
Thermal stress limit	12100000 kA ² .s
Standards	IEC 61439-6 IEC 61439-1

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Derating factor	0...35 °C (100 % of In) 35...40 °C (97 % of In) 40...45 °C (93 % of In) 45...50 °C (90 % of In) 50...55 °C (86 % of In)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	60.0 cm
Package 1 Width	200.0 cm
Package 1 Length	69.0 cm
Package 1 Weight	172.0 kg