


# Product data sheet

## Characteristics

# KTA3200CP74

Edgewise and flat zed unit, Canalis KTA, aluminium, 3200A, 3L+N+PER (Cu), high Icw, made to measure, neutral N4, RAL9001

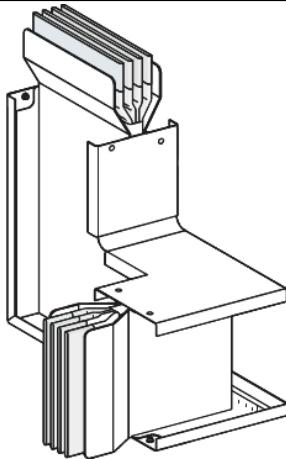

### Main

Range	Canalis
Product name	KT
Product or component type	Multiple elbow
Busbar description	Standard
Device short name	KTA
Device application	Change direction
Material	Aluminium
[Ie] rated operational current	3200 A at 35 °C
Polarity	3L + N + PER
Direction change type	Direction 2: edgewise to upward Direction 1: flat to left
Operating angle	90 °
Earth conductor	Reinforced
Short-circuit level	Reinforced version
Provided equipment	Jointing unit Trunking unit

### Complementary

Housing material	Polyester film
Contacts material	Copper
[Ue] rated operational voltage	1000 V
Network frequency	50/60 Hz
[Ui] rated insulation voltage	1000 V
[Icw] rated short-time withstand current	113 kA
[Ipk] rated peak withstand current	248 kA
Radiated magnetic field	2.1 µT
Thermal stress limit	12769000 kA <sup>2</sup> .s
THDI	0...15 % 3200 A 15...33 % 4000 A
Maximum voltage drop	<0.0018 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.0019 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0018 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0017 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Neutral position	Left
Standards	IEC 61439-6 IEC 61439-1
Dimension type	Made to measure
Width	140 mm
Height	Direction 2: 320...699 mm
Colour	White (RAL 9001)
Length	Direction 1: 300 mm Direction 3: 400 mm
Linear load	46 kg/m

## Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Derating factor	0...35 °C (100 % of $I_n$ ) 35...40 °C (97 % of $I_n$ ) 40...45 °C (93 % of $I_n$ ) 45...50 °C (90 % of $I_n$ ) 50...55 °C (86 % of $I_n$ )

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	35.0 cm
Package 1 Width	103.2 cm
Package 1 Length	64.2 cm
Package 1 Weight	71.7 kg