


KTB0630SD4

Tap off unit, Canalis KS, for DIN fuses size 3, 630A, 3L+N+PE, with isolator, fuses not supplied, IP55, RAL9001

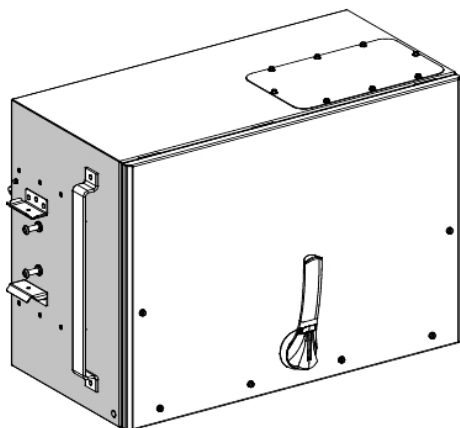

Main

Range of product	Canalis
Range compatibility	Canalis KT busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KT busbar trunking with KS type plug-in
[Ie] rated operational current	630 A at 35 °C
Protection type	Switch-disconnector fuse: DIN fuse, size 3
Provided equipment	Fuse to be ordered separately
Mounting mode	Plug-in with auto-clamping system
Tap-off unit polarity	3L+N+PE
Colour	White (RAL 9001)

Complementary

Device application	High power distribution
[Ue] rated operational voltage	500 V
[Ui] rated insulation voltage	500 V
Network frequency	50/60 Hz
Control type	Rotary handle
Electrical connection	Cable clamp terminal - ISO70 300 mm ² (x2) - for L/N Cable clamp terminal - ISO70 150 mm ² (x1) - for PE
Door/cover opening side	Front
Tap-off unit disconnection mode	By drawing out
Standards	IEC 61439-1 IEC 61439-6
Width	838 mm
Depth	520 mm
Height	550 mm
Net weight	64 kg

Environment

Earthing system	TT TN-S IT
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	53.000 cm
Package 1 Width	57.000 cm
Package 1 Length	90.000 cm
Package 1 Weight	64.000 kg

Offer Sustainability

EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins