


# Product data sheet

## Characteristics

# KTC6300YA5

Junction block, Canalis KTA, single reference, 6300A, copper conductors, 3L+N+PE Reinforced (Al)

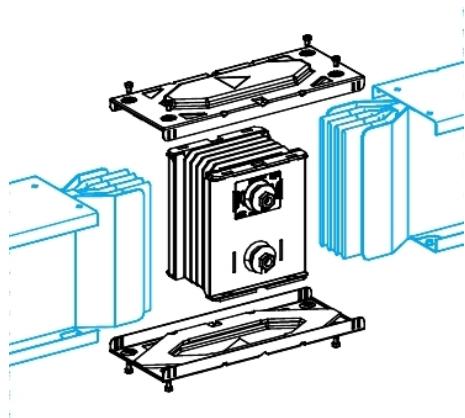

### Main

Range	Canalis
Product name	KT
Product or component type	Junction block
Offer type	Spare part
Busbar description	Standard
Range compatibility	Canalis KTC
Accessory / separate part category	Connection accessory
Device application	Jointing
Material	Copper
[Ie] rated operational current	6300 A with copper
Polarity	3L + N + PER
PE conductor	Reinforced
lcw short-circuit version	Standard version
IP degree of protection	IP55 conforming to IEC 60529
Length	360 mm

### Complementary

Housing material	Polyester film
Mounting support	Self-tapping screw
[Ue] rated operational voltage	1000 V
Number of circuits	1
Colour	White (RAL 9001)
Width	140 mm
Height	618 mm
Standards	IEC 61439-6 IEC 61439-1

### Environment

IK degree of protection	IK08 conforming to IEC 62262
-------------------------	------------------------------

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	62.2 cm
Package 1 Width	14.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	47.6 kg

## Offer Sustainability

---

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins