


# LVS03041

Mounting plate, PrismaSeT G, for NSX/  
CVS/Vigi 250A vertical fixed, rotary handle,  
W600mm



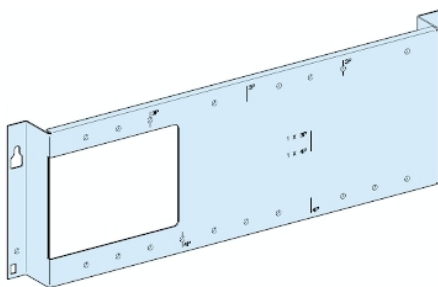

## Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - vertical installation
Poles description	4 x 3P: fixed CVS100...160 vertical installation 3 x 4P: fixed CVS100...160 vertical installation 4 x 3P: fixed CVS250 vertical installation 3 x 4P: fixed CVS250 vertical installation 4 x 3P: fixed NSX100...160 vertical installation 3 x 4P: fixed NSX100...160 vertical installation 4 x 3P: fixed NSX250 vertical installation 3 x 4P: fixed NSX250 vertical installation
Condition of using cable tie	Need additional plate (1M high) when installation of device is in vertical

Number of vertical modules [50 mm]	<p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p>
Standards	IEC 61439-2
Product certifications	ASTA

## Complementary

Cable entry	Cut-out plates 0.36 mm top or bottom 167 mm Cut-out plates 0.31 mm top or bottom 267 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 mm



## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.3 cm
Package 1 Width	15.2 cm
Package 1 Length	47 cm
Package 1 Weight	946 g
Unit Type of Package 2	S04
Number of Units in Package 2	14
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	13.944 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product