




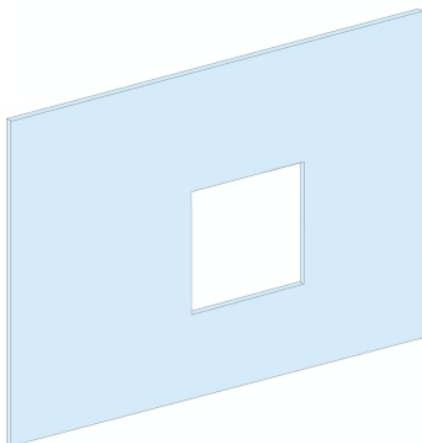

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: drawout NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: drawout NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX630 without earth leakage protection - control: motor mechanism - vertical installation

Poles description	1 x 4P: mounting plate support: NSX400 vertical installation 1 x 3P: mounting plate support: CVS400 vertical installation 1 x 4P: mounting plate support: CVS400 vertical installation 1 x 3P: mounting plate support: CVS630 vertical installation 1 x 4P: mounting plate support: CVS630 vertical installation 1 x 3P: mounting plate support: NSX400 vertical installation 1 x 3P: mounting plate support: NSX630 vertical installation 1 x 4P: mounting plate support: NSX630 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Linery FC Direct connection
Number of vertical modules [50 mm]	9
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA
Material	Steel
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	450 mm
Width	500 mm
Net weight	1.72 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	46.500 cm
Package 1 Length	51.500 cm
Package 1 Weight	1.690 kg
Unit Type of Package 2	BB1
Number of Units in Package 2	6
Package 2 Height	11.000 cm
Package 2 Width	52.500 cm
Package 2 Length	52.500 cm
Package 2 Weight	10.748 kg
Unit Type of Package 3	P12
Number of Units in Package 3	72
Package 3 Height	76.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	141.500 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product