


Product data sheet

Characteristics

LVS03343

Front plate, PrismaSeT P and G, transparent,
for enclosure W600/W650, 6M, white, RAL
9003

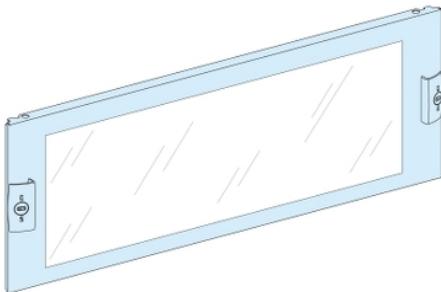

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Transparent
Installed device	Power meters: kilowatt-hour meters - vertical installation Connection TeSys: fixed GV3Pxx1 + LC1D40 to D65 - horizontal installation
Poles description	3 x 2P: mounting plate support: kilowatt-hour meters vertical installation 2 x 4P: mounting plate support: kilowatt-hour meters vertical installation 7 x 3P: modular rail support: GV3Pxx1 + LC1D40 to D65 horizontal installation

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm Pack enclosure - width 555 mm
Number of vertical modules [50 mm]	6
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA
Material	Glass
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	300 mm
Width	500 mm
Net weight	1.38 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Quantity per set	Set of 1
Functional unit	600 mm PrismaSeT G floor-standing enclosure power meters kilowatt-hour meters vertical 2P 3 6 600 mm PrismaSeT G wall-mounted enclosure power meters kilowatt-hour meters vertical 2P 3 6 600 mm PrismaSeT G floor-standing enclosure connection 2 6 600 mm PrismaSeT G wall-mounted enclosure connection 2 6 650 mm 400 mm PrismaSeT P cubicle connection 2 6 600 mm PrismaSeT G floor-standing enclosure TeSys GV3Pxx1 + LC1D40 to D65 fixed horizontal 3P 7 direct 7 600 mm PrismaSeT G wall-mounted enclosure TeSys GV3Pxx1 + LC1D40 to D65 fixed horizontal 3P 7 direct 7 600 mm PrismaSeT G floor-standing enclosure power meters kilowatt-hour meters vertical 4P 2 6 600 mm PrismaSeT G wall-mounted enclosure power meters kilowatt-hour meters vertical 4P 2 6 650 mm 400 mm PrismaSeT P cubicle power meters kilowatt-hour meters vertical 2P 3 6 650 mm 400 mm PrismaSeT P cubicle power meters kilowatt-hour meters vertical 4P 2 6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3 cm
Package 1 Width	31.5 cm
Package 1 Length	51.5 cm
Package 1 Weight	1.431 kg
Unit Type of Package 2	BB1
Number of Units in Package 2	8
Package 2 Height	16.5 cm
Package 2 Width	32.5 cm
Package 2 Length	53 cm
Package 2 Weight	11.726 kg
Unit Type of Package 3	P12
Number of Units in Package 3	48
Package 3 Height	46 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	81.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product