


LVS03415

Mounting plate, PrismaSeT P, for Vigi NSX
3/4P 250A, horizontal withdrawable, all
controls, 5M, W650mm

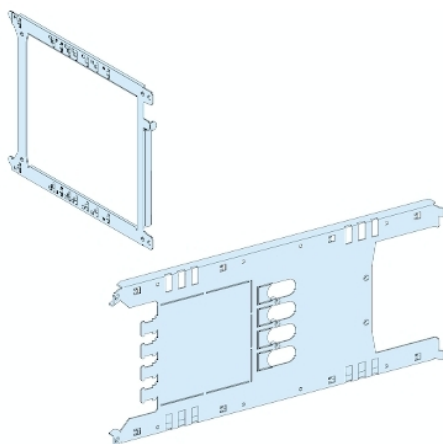

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm
Installed device	ComPact: drawout NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: toggle - horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: toggle - horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: toggle - horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: motor mechanism - horizontal installation
Poles description	1 x 3P: drawout NSX100...160 horizontal installation 1 x 4P: drawout NSX100...160 horizontal installation 1 x 3P: drawout NSX250 horizontal installation 1 x 4P: drawout NSX250 horizontal installation
Number of vertical modules [50 mm]	5 module(s): NSX100...160 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX250 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX100...160 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX250 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company Schneider Electric. It is not intended to be used as a substitute for a specific user application. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	575 mm
Height	245 mm
Net weight	2.78 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout motor mechanism horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout toggle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without drawout toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout motor mechanism horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout toggle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without drawout toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout motor mechanism horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout toggle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with drawout toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with drawout direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with drawout motor mechanism horizontal 3P 1 direct 5 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.3 cm
Package 1 Width	25 cm
Package 1 Length	57.5 cm
Package 1 Weight	2.803 kg
Unit Type of Package 2	S04
Number of Units in Package 2	4
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	11.91 kg
Unit Type of Package 3	P12
Number of Units in Package 3	16
Package 3 Height	43 cm
Package 3 Width	80 cm

Package 3 Length	120 cm
Package 3 Weight	59 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product