


# Product data sheet

## Characteristics

# LVS03457

Mounting plate, PrismaSeT P, for NSX/INS/INV 630 3P/4P horizontal source changeover motor mech, 650mm

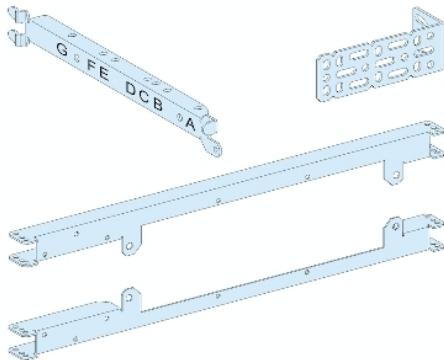

### Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm
Installed device	Source changeover: fixed NSX400...630 source changeover without earth leakage protection - control: remote control - horizontal installation
Poles description	2 x 3P: fixed NSX400...630 source changeover horizontal installation 2 x 4P: fixed NSX400...630 source changeover horizontal installation
Number of vertical modules [50 mm]	10 module(s): NSX400...630 source changeover without earth leakage protection , direct in 650 mm Widucubicle
Standards	IEC 61439-2
Product certifications	ASTA

### Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	650 mm
Height	500 mm
Net weight	2.82 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle source changeover NSX400...630 source changeover without fixed remote control horizontal 3P 2 direct 10 12.5 mm 650 mm 400 mm PrismaSeT P cubicle source changeover NSX400...630 source changeover without fixed remote control horizontal 4P 2 direct 10 12.5 mm

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5 cm
Package 1 Width	8 cm
Package 1 Length	58 cm
Package 1 Weight	2.762 kg
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	22.917 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Unit Type of Package 3	P12
Number of Units in Package 3	32
Package 3 Height	44 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	103 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product