


LVS03461

Mounting Plate, PrismaSeT G, for 2 NSX/CSV/
INS 3P/4P 630A vertical fixed/plugin toggle/
Rot/Mot, enclosure W650



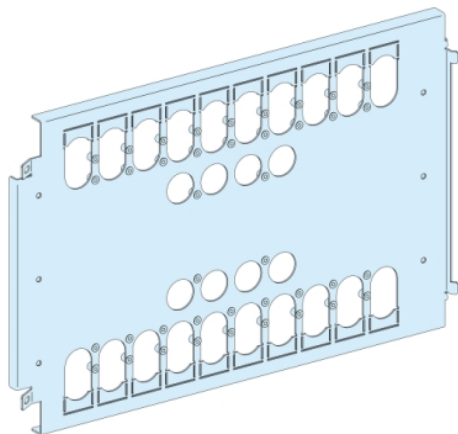

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm

EasyPact: fixed CVS400 without earth leakage protection - control: toggle - vertical installation
 EasyPact: fixed CVS630 without earth leakage protection - control: toggle - vertical installation
 EasyPact: fixed EZC400 - control: toggle - vertical installation
 EasyPact: fixed EZC630 - control: toggle - vertical installation
 ComPact: fixed INS320...400 - control: direct front rotary handle - vertical installation
 ComPact: fixed INS500...630 - control: direct front rotary handle - vertical installation
 ComPact: fixed INV320...400 - control: direct front rotary handle - vertical installation
 ComPact: fixed INV500...630 - control: direct front rotary handle - vertical installation
 ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation
 ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation
 EasyPact: fixed CVS400 with earth leakage protection - control: toggle - vertical installation
 EasyPact: fixed CVS630 with earth leakage protection - control: toggle - vertical installation
 ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation
 ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation
 EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle - vertical installation
 EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation
 EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle - vertical installation
 EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: plug-in NSX400 without earth leakage protection - control: toggle - vertical installation
 ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - vertical installation
 ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - vertical installation
 ComPact: drawout NSX400 without earth leakage protection - control: toggle - vertical installation
 ComPact: drawout NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: drawout NSX400 without earth leakage protection - control: motor mechanism - vertical installation
 ComPact: plug-in NSX630 without earth leakage protection - control: toggle - vertical installation
 ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - vertical installation
 ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation
 ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - vertical installation
 ComPact: drawout NSX630 without earth leakage protection - control: toggle - vertical installation
 ComPact: drawout NSX630 without earth leakage protection - control: motor mechanism - vertical installation

Poles description	1 x 3P: fixed CVS400 vertical installation 1 x 4P: fixed CVS400 vertical installation 1 x 3P: fixed CVS630 vertical installation 1 x 4P: fixed CVS630 vertical installation 1 x 3P: fixed EZC400 vertical installation 1 x 4P: fixed EZC400 vertical installation 1 x 3P: fixed EZC630 vertical installation 1 x 4P: fixed EZC630 vertical installation 1 x 3P: fixed INS320...400 vertical installation 1 x 4P: fixed INS320...400 vertical installation 1 x 3P: fixed INS500...630 vertical installation 1 x 4P: fixed INS500...630 vertical installation 1 x 3P: fixed INV320...400 vertical installation 1 x 4P: fixed INV320...400 vertical installation 1 x 3P: fixed INV500...630 vertical installation 1 x 4P: fixed INV500...630 vertical installation 1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation 1 x 3P: plug-in NSX400 vertical installation 1 x 4P: plug-in NSX400 vertical installation 1 x 3P: drawout NSX400 vertical installation 1 x 4P: drawout NSX400 vertical installation 2 x 3P: fixed NSX400 vertical installation 2 x 4P: fixed NSX400 vertical installation 2 x 3P: plug-in NSX400 vertical installation 2 x 4P: plug-in NSX400 vertical installation 2 x 3P: drawout NSX400 vertical installation 2 x 4P: drawout NSX400 vertical installation 1 x 3P: plug-in NSX630 vertical installation 1 x 4P: plug-in NSX630 vertical installation 1 x 3P: drawout NSX630 vertical installation 1 x 4P: drawout NSX630 vertical installation 2 x 3P: fixed NSX630 vertical installation 2 x 4P: fixed NSX630 vertical installation 2 x 3P: plug-in NSX630 vertical installation 2 x 4P: plug-in NSX630 vertical installation 2 x 3P: drawout NSX630 vertical installation 2 x 4P: drawout NSX630 vertical installation 2 x 3P: fixed CVS630 vertical installation 2 x 4P: fixed CVS630 vertical installation 2 x 3P: fixed CVS400 vertical installation 2 x 4P: fixed CVS400 vertical installation
Number of vertical modules [50 mm]	13 module(s): CVS400 without earth leakage protection , direct in 650 mm Widecubicle 13 module(s): CVS630 without earth leakage protection , direct in 650 mm Widecubicle 13 module(s): EZC400, direct in 650 mm Widecubicle 13 module(s): EZC630, direct in 650 mm Widecubicle 10 module(s): INS320...400, direct in 650 mm Widecubicle 11 module(s): INS500...630, direct in 650 mm Widecubicle 10 module(s): INV320...400, direct in 650 mm Widecubicle 11 module(s): INV500...630, direct in 650 mm Widecubicle 11 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle 13 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle 15 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle 13 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle 15 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle 13 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle 13 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle 15 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	650 mm
Height	372 mm

Net weight	5.08 kg
------------	---------

[illegible]

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.7 cm
Package 1 Width	37.5 cm
Package 1 Length	57.5 cm
Package 1 Weight	5.104 kg
Unit Type of Package 2	S04
Number of Units in Package 2	3
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	16.0 kg
Unit Type of Package 3	P12
Number of Units in Package 3	36
Package 3 Height	103.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	205.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product