




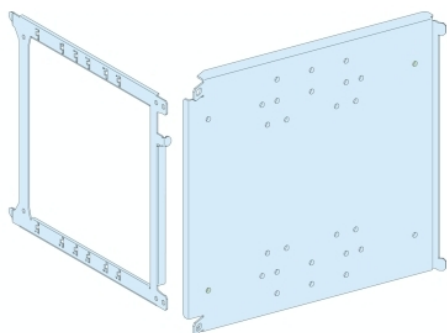

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 400 mm depth 400 mm
Installed device	ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NS1250 - control: toggle - vertical installation ComPact: fixed NS1250 - control: direct front rotary handle - vertical installation ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: toggle - vertical installation ComPact: fixed NS1600 - control: direct front rotary handle - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: toggle - vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation

Poles description	1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation 1 x 3P: plug-in NSX400 vertical installation 1 x 4P: plug-in NSX400 vertical installation 1 x 3P: plug-in NSX630 vertical installation 1 x 4P: plug-in NSX630 vertical installation 1 x 3P: fixed NS1250 vertical installation 1 x 4P: fixed NS1250 vertical installation 1 x 3P: fixed NS1600 vertical installation 1 x 4P: fixed NS1600 vertical installation 1 x 3P: fixed NS630b...1000 vertical installation 1 x 4P: fixed NS630b...1000 vertical installation
Number of vertical modules [50 mm]	36 module(s): NS1250, direct in 400 mm Widecubicle 36 module(s): NS1600, direct in 400 mm Widecubicle 36 module(s): NS630b...1000, direct in 400 mm Widecubicle 12 module(s): NSX400 without earth leakage protection , front connection in 400 mm Widecubicle 12 module(s): NSX630 without earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX400 with earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX630 with earth leakage protection , front connection in 400 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	400 mm
Height	300 mm

Net weight	2.7 kg
------------	--------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	31.000 cm
Package 1 Length	37.500 cm
Package 1 Weight	2.878 kg
Unit Type of Package 2	S04
Number of Units in Package 2	4
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	12.600 kg
Unit Type of Package 3	P12
Number of Units in Package 3	96
Package 3 Height	105.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	319.000 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product