Product data sheet
Characteristics

LVS03902
SUPPORT WITH 72X72 CUT-OUT FOR METERING DEV/P-BUTTON FOR FR.PL.03904/VISOR 03928

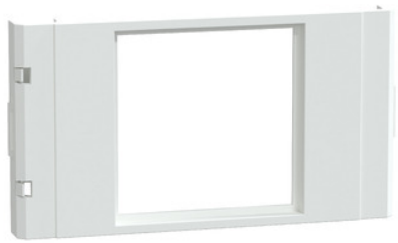

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 400 mm depth 400 mm Cubicle - width 650 mm depth 400 mm Cubicle duct - width 300 mm depth 400 mm
Installed device	Human-switchboard interface: 72 x 72 mm device Vigirex: RH10 Vigirex: RH21 Vigirex: RH99
Number of vertical modules [50 mm]	3 module(s): 72 x 72 mm device in 600 mm Widefloor-standing enclosure 3 module(s): 72 x 72 mm device in 600 mm Widewall-mounted enclosure 3 module(s): 72 x 72 mm device in 650 mm Widecubicle 3 module(s): 72 x 72 mm device in 300 mm Widecubicle duct 3 module(s): 72 x 72 mm device in 400 mm Widecubicle 3 module(s): RH10 in 600 mm Widefloor-standing enclosure 3 module(s): RH10 in 600 mm Widewall-mounted enclosure 3 module(s): RH10 in 650 mm Widecubicle 3 module(s): RH10 in 300 mm Widecubicle duct 3 module(s): RH10 in 400 mm Widecubicle 3 module(s): RH21 in 600 mm Widefloor-standing enclosure 3 module(s): RH21 in 600 mm Widewall-mounted enclosure 3 module(s): RH21 in 650 mm Widecubicle 3 module(s): RH21 in 300 mm Widecubicle duct 3 module(s): RH21 in 400 mm Widecubicle 3 module(s): RH99 in 600 mm Widefloor-standing enclosure 3 module(s): RH99 in 600 mm Widewall-mounted enclosure 3 module(s): RH99 in 650 mm Widecubicle 3 module(s): RH99 in 300 mm Widecubicle duct 3 module(s): RH99 in 400 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Material	Plastic
Colour	White (RAL 9001)
Width	81 mm
Height	150 mm
Depth	15 mm
Net weight	0.04 kg
Functional unit	600 mm PrismaSeT G floor-standing enclosure human-switchboard interface 72 x 72 mm device 5 3 600 mm PrismaSeT G wall-mounted enclosure human-switchboard interface 72 x 72 mm device 5 3 650 mm 400 mm PrismaSeT P cubicle human-switchboard interface 72 x 72 mm device 5 3 300 mm 400 mm PrismaSeT P cubicle duct human-switchboard interface 72 x 72 mm device 5 3 400 mm 400 mm PrismaSeT P cubicle human-switchboard interface 72 x 72 mm device 5 3 600 mm PrismaSeT G floor-standing enclosure Vigirex 5 3 600 mm PrismaSeT G wall-mounted enclosure Vigirex 5 3 650 mm 400 mm PrismaSeT P cubicle Vigirex 5 3 300 mm 400 mm PrismaSeT P cubicle duct Vigirex 5 3 400 mm 400 mm PrismaSeT P cubicle Vigirex 5 3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.5 cm
Package 1 Width	8.1 cm
Package 1 Length	14.8 cm
Package 1 Weight	35.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	200
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	7.674 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes