


LVS04060

Universal power supply block, Linergy BW, for NSX/CVS/INS/INV 250A, 4P, with connections

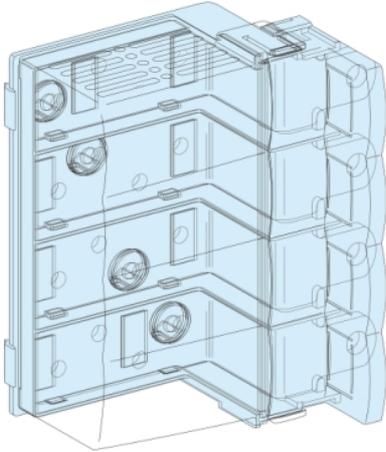

Main

Range	Linergy
Range of product	Linergy
Product or component type	Power supply block
Product name	Linergy BW
Product name	PrismaSeT PrismaSeT P enclosure PrismaSeT PrismaSeT G enclosure Linergy Linergy BW busbar
Accessory / separate part category	Current distribution accessory
Provided equipment	With connection
Standards	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Product certifications	ASTA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Cubicle-device connection	Linergy BW busbar
Poles description	4P
Installation description	<p>Cubicle - width 650 mm</p> <p>Floor-standing enclosure - width 600 mm</p> <p>Wall-mounted enclosure - width 600 mm</p> <p>Floor-standing enclosure - width 850 mm</p> <p>Pack enclosure - width 600 mm</p> <p>Floor-standing enclosure + duct - width 600 + 300 mm</p> <p>Wall-mounted enclosure + duct - width 600 + 300 mm</p>
Installed device	<p>ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed INS250 - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed INS250 - control: direct front rotary handle vertical installation</p> <p>EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle horizontal installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed INV250 - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed INV100 - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed INV250 - control: direct front rotary handle vertical installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed NSX100...250 and ammeter without earth leakage protection - control: toggle horizontal installation</p> <p>EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle horizontal installation</p> <p>EasyPact: fixed CVS250 with earth leakage protection - control: toggle horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed INV100 - control: direct front rotary handle vertical installation</p> <p>ComPact: fixed INV250 - control: lateral handle vertical installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism horizontal installation</p> <p>ComPact: fixed INS250 - control: lateral handle vertical installation</p> <p>ComPact: fixed INV200 - control: direct front rotary handle vertical installation</p> <p>ComPact: fixed INV160 - control: direct front rotary handle horizontal installation</p> <p>ComPact: fixed INV160 - control: direct front rotary handle vertical installation</p> <p>ComPact: fixed INV200 - control: direct front rotary handle horizontal installation</p>
[I _e] rated operational current	250 A
Net weight	1.18 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.5 cm
Package 1 Width	14.7 cm
Package 1 Length	17.8 cm
Package 1 Weight	1.181 kg
Unit Type of Package 2	P12
Number of Units in Package 2	150
Package 2 Height	66.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	188.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Circularity Profile	No need of specific recycling operations
PVC free	Yes