


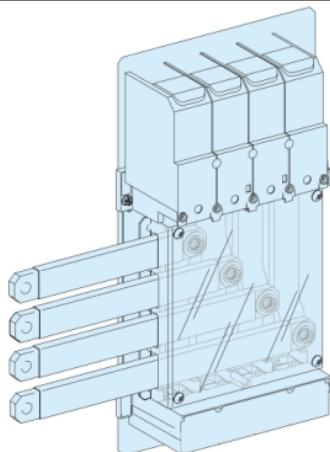

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Incoming connection block
Product name	PrismaSeT PrismaSeT G enclosure
Accessory / separate part category	Connection accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Location of connection	Bottom Top
Installation description	Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	ComPact: fixed NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: toggle horizontal installation
[I _e] rated operational current	630 A
Net weight	7.72 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company. This information is not intended to be used as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Quantity per set	Set of 1
Functional unit	850 mm PrismaSeT G floor-standing enclosure ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 9 850 mm PrismaSeT G floor-standing enclosure ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 9 850 mm PrismaSeT G floor-standing enclosure ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 9 850 mm PrismaSeT G floor-standing enclosure ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 9 850 mm PrismaSeT G floor-standing enclosure ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 6 850 mm PrismaSeT G floor-standing enclosure ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 6 850 mm PrismaSeT G floor-standing enclosure ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 6 850 mm PrismaSeT G floor-standing enclosure ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 6 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 9 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 9 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 9 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 9 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 6 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX400 without fixed toggle horizontal 3P 1 connection block 6 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 6 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX400 without fixed toggle horizontal 4P 1 connection block 6 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 9 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 9 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 9 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 9 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 6 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX630 without fixed toggle horizontal 3P 1 connection block 6 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 6 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX630 without fixed toggle horizontal 4P 1 connection block 6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.5 cm
Package 1 Width	23.5 cm
Package 1 Length	43.5 cm
Package 1 Weight	7.52 kg
Unit Type of Package 2	P12
Number of Units in Package 2	20
Package 2 Height	50.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	162.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations