


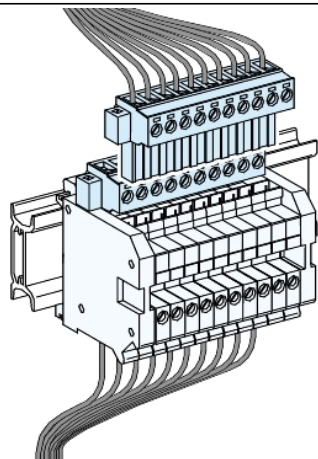

Main

Range	Linergy
Range of product	Linergy
Product or component type	Terminal block
Product name	Linergy TA
Accessory / separate part category	Connection accessory
Range compatibility	Linergy Linergy TA auxiliary connector PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Product compatibility	Auxiliary connection

Complementary

Enclosure/cubicle description	Cubicle Floor-standing enclosure Wall-mounted enclosure
[Ie] rated operational current	12 A (40 °C) at 250 V AC conforming to IEC 20 A (40 °C) at 300 V AC conforming to UL
Tightening torque	0.5...0.6 N.m
Connections - terminals	Input: screw terminal 10 pin(s) 0.2...4 mm ² rigid without cable end Output: removable screw terminal block 20 pin(s) 0.2...4 mm ² flexible with cable end
Conductor material	Copper
Quantity per set	Set of 1
Height	50 mm
Width	65 mm
Depth	50 mm
Net weight	0.12 kg
Colour	Light grey (RAL 7035)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.0 cm
Package 1 Width	5.2 cm
Package 1 Length	6.4 cm
Package 1 Weight	110.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	50
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	5.705 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes