


Product data sheet

Characteristics

LVS04426

Connection transfer assembly, PrismaSeT P, in duct for fixed horizontal NSX250 with toggle, 4P

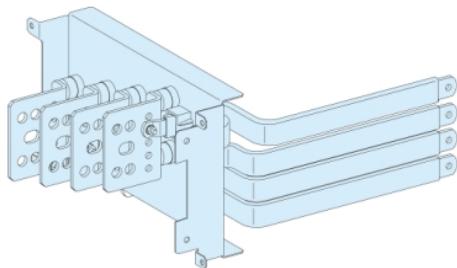

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection transfer assembly
Product name	PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	4P
Installation description	Cubicle - width 650 mm
Installed device	ComPact: fixed NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle horizontal installation
[Ie] rated operational current	250 A
Busbar cross section	20 x 3 mm
Height	200 mm
Width	350 mm
Net weight	5.18 kg
Quantity per set	Set of 1
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed toggle horizontal 4P 1 direct 4 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed toggle horizontal 4P 1 direct 4

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.500 cm
Package 1 Width	27.000 cm
Package 1 Length	40.500 cm
Package 1 Weight	5.127 kg
Unit Type of Package 2	P12
Number of Units in Package 2	26
Package 2 Height	75.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	144.000 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Circularity Profile	No need of specific recycling operations