


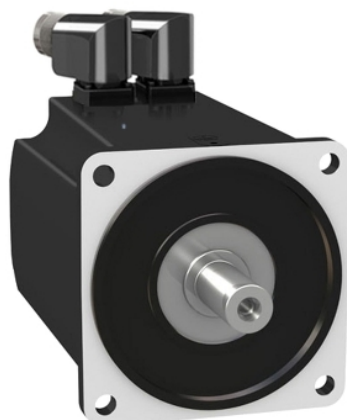

Main

Range compatibility	PacDrive 3
Device short name	MH3
Product or component type	AC servo motors

Complementary

Maximum mechanical speed	4000 rpm
[Us] rated supply voltage	115...480 V
Network number of phases	Three phase
Continuous stall current	18 A
Continuous stall torque	24 N.m, 115...480 V, three phase
Continuous power	4750 W
Peak stall torque	75 N.m, 115...480 V, three phase
Nominal output power	1.78 W, 115 V 3.55 W, 230 V 4.75 W, 400 V 4.75 W, 480 V
Nominal torque	22.17 N.M for LXM52 at 18.00 mA, 115 V, 1 phase 19.3 N.M for LXM52 at 14.90 mA, 230 V, 1 phase 13.06 N.M for LXM52 at 10.42 mA, 400 V, 3 phases 13.06 N.M for LXM52 at 10.42 mA, 480 V, 3 phases 22.17 N.M for LXM62 at 18.00 mA, 115 V, 1 phase 19.3 N.M for LXM62 at 14.90 mA, 230 V, 1 phase 13.06 N.M for LXM62 at 10.42 mA, 400 V, 3 phases 13.06 N.m for LXM62 at 10.42 mA, 480 V, 3 phases
Nominal speed	750 rpm for LXM52 at 18.00 mA, 115 V, 1 phase 1750 rpm for LXM52 at 14.90 mA, 230 V, 1 phase 3500 rpm for LXM52 at 10.42 mA, 400 V, 3 phases 3500 rpm for LXM52 at 10.42 mA, 480 V, 3 phases 750 rpm for LXM62 at 18.00 mA, 115 V, 1 phase 1750 rpm for LXM62 at 14.90 mA, 230 V, 1 phase 3500 rpm for LXM62 at 10.42 mA, 400 V, 3 phases 3500 rpm for LXM62 at 10.42 mA, 480 V, 3 phases
Maximum current Irms	62.32 A
Shaft end	Parallel key
Second shaft	Without second shaft end
Shaft diameter	24 mm
Shaft length	50 mm
Key width	8 mm
IP degree of protection	IP65 standard
Encoder type	Multiturn SinCos Hiperface
Speed feedback resolution	16 periods
Holding brake	With
Holding torque	23 N.m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Mounting support	International standard flange
Motor flange size	140 mm
Electrical connection	Rotatable right-angled connectors
Torque constant	1.33 N.m/A at 120 °C
Back emf constant	85.9 V/krpm
Number of motor poles	10
Rotor inertia	50.27 kg.cm ²
Stator resistance	0.22 Ohm
Stator inductance	3 mH
Stator electrical time constant	13.6 ms
Maximum radial force Fr	2420 N at 1000 rpm 1920 N at 2000 rpm 1670 N at 3000 rpm
Brake pull-in power	19 W
Type of cooling	Natural convection
Length	267 mm
Centring collar diameter	130 mm
Centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	11 mm
Circle diameter of the mounting holes	165 mm
Net weight	18.5 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	26.0 cm
Package 1 Width	20.0 cm
Package 1 Length	59.0 cm
Package 1 Weight	17.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes