

# Product data sheet

## Characteristics

### SSM1D212BD

single phase relay, Harmony Solid State Modular Relays, 12A, DIN rail mount, DC switching, input 4 to 32V DC, output 1 to 60V DC, 1NO



#### Main

Range of product	Harmony Solid State Relays
Product or component type	Solid state relay up to 20 A
Device short name	SSM
Number of channels	1
Number of phases	1 phase
Output switching mode	DC switching

#### Complementary

Mounting support	Symmetrical DIN rail
[In] rated current	12 A
Output voltage	1...60 V DC
[Uc] control circuit voltage	4...32 V DC
Tightening torque	0.5...0.8 N.m for input 0.5...0.8 N.m for output
Connections - terminals	Screw terminals: 1 x 0.3...1 x 1.5 mm <sup>2</sup> , (AWG 22...AWG 16) for input Screw terminals: 1 x 0.3...1 x 2.5 mm <sup>2</sup> , (AWG 22...AWG 14) for output
Maximum capacitance	10 pF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED (green) for input status
Minimum switching voltage	4 V DC turn-on
Maximum switching voltage	1 V DC turn-off
Input current	9...11 mA
Solid state output type	DC switching Mosfet output
Load current	0.0025...12 A
Transient overvoltage	60 V
Surge current	100 A for 10 ms
Maximum voltage drop	<0.5 V on-state
Resistance	0.045 Ohm on-state
Maximum leakage current	0.1 mA off-state
Response time	0.6 ms (turn-on) 0.3 ms (turn-off)
Overvoltage category	III
Width	18 mm
Height	90.3 mm
Depth	83.7 mm
Net weight	0.09 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	4 KV DC for input/output 4 KV DC for input or output to case
Pollution degree	2
Standards	IEC 61000 IEC 60950-1 IEC 62314
Product certifications	CSA[RETURN]JUL
Marking	CE
IP degree of protection	IP20
Ambient air temperature for operation	-30...80 °C
Ambient air temperature for storage	-30...100 °C


## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	9.000 cm
Package 1 Length	9.500 cm
Package 1 Weight	89.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	72
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	7.197 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>


Dimensions

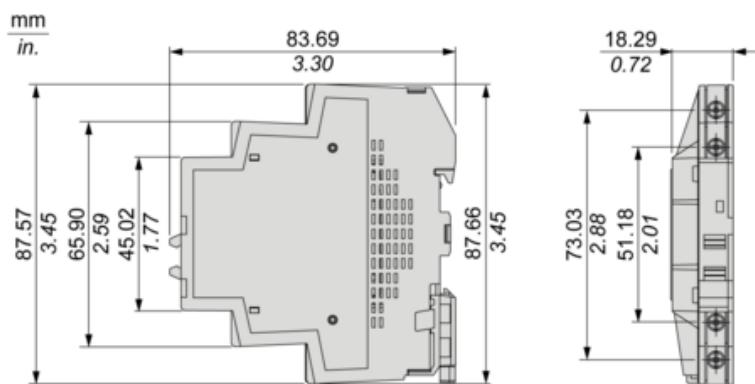

---

### Derating Curves

---

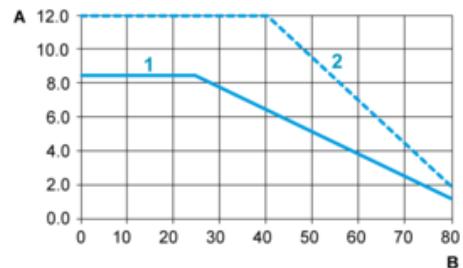

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 18 mm