



Main

Range of product	Modicon M171
Product or component type	Display module
Display colour	Monochrome
Supply	External source

Complementary

Display type	Backlit LCD screen
Number of key	4
Colour	White
[Us] rated supply voltage	12 V DC
Power consumption in W	0 W 5 W
Marking	CE
Realtime clock	With clock
Local signalling	LCD display
Product compatibility	Logic controller M171 optimized
Height	137 mm
Width	96.5 mm
Depth	31.3 mm
Net weight	0.143 kg

Environment

Product certifications	cURus
IP degree of protection	IP40 front face:


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.0 cm
Package 1 Width	9.1 cm
Package 1 Length	18.5 cm
Package 1 Weight	294.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	6
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	2.068 kg

Offer Sustainability


REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Upgradeability	Upgradeable through digital modules and upgraded components

Dimensions

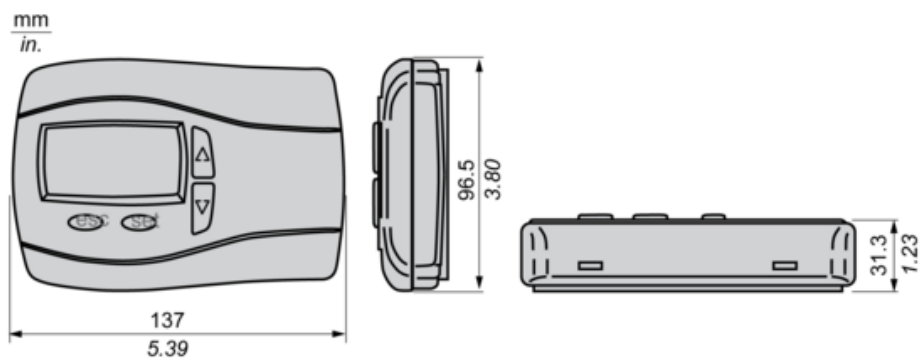


Mounting

mm
in.

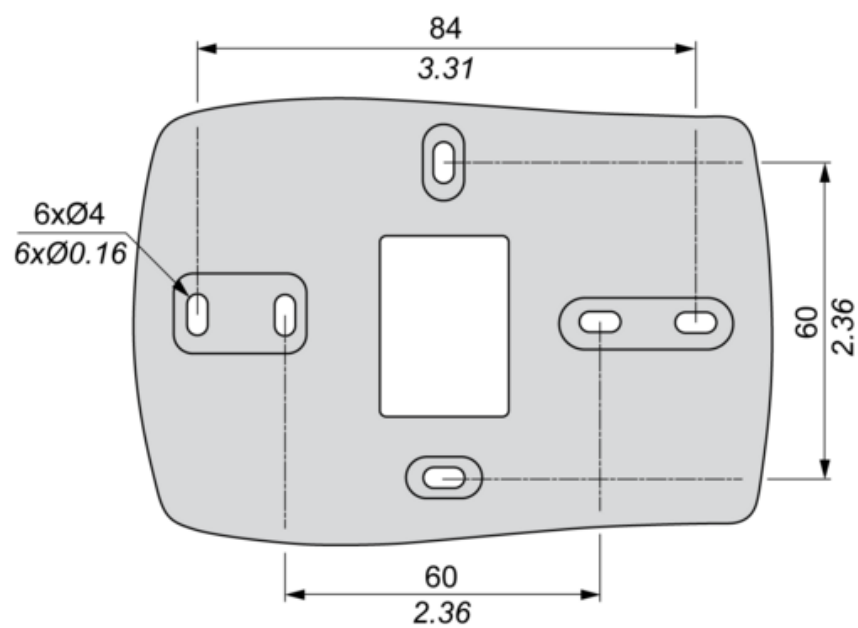


Wiring Diagram

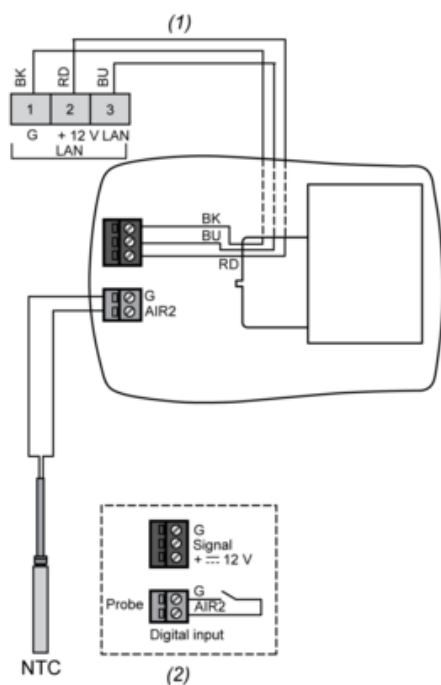

- (1) LAN Expansion bus
(2) Remote probe not included
RD : Red
BU : Blue
BK : Black

Ex.Transducer

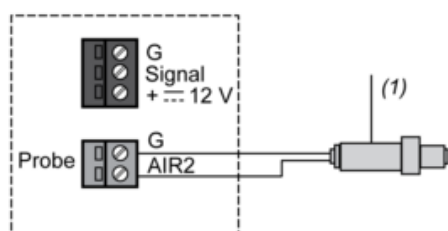

- (1) Power supply