
# Product data sheet Characteristics

## TM1STNTCSF44030

NTC 3,0m FAST IP67 4x40 -50+110°C Grey

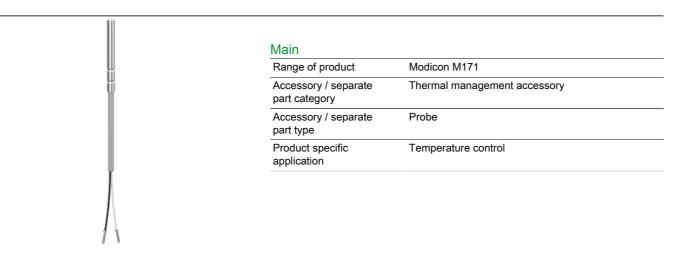

#### Complementary

NTC	
Cables	
3 m (+/- 3 %)	
2 conductors cable for controller side	
Cable with wire end ferrule	
Clip-on	
40 mm	
4 mm	
	Cables 3 m (+/- 3 %) 2 conductors cable for controller side Cable with wire end ferrule Clip-on 40 mm

#### Environment

IP degree of protection	IP67

#### Packing Units

i doking office	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	11.000 cm
Package 1 Length	12.500 cm
Package 1 Weight	33.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	5.000 cm
Package 2 Width	11.000 cm
Package 2 Length	12.500 cm
Package 2 Weight	170.000 g
Unit Type of Package 3	S01
Number of Units in Package 3	60
Package 3 Height	15.000 cm
Package 3 Width	15.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	2.241 kg

### Offer Sustainability

REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	₫Yes